
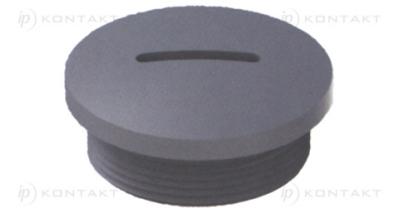


FP-8881 - Screw plugs

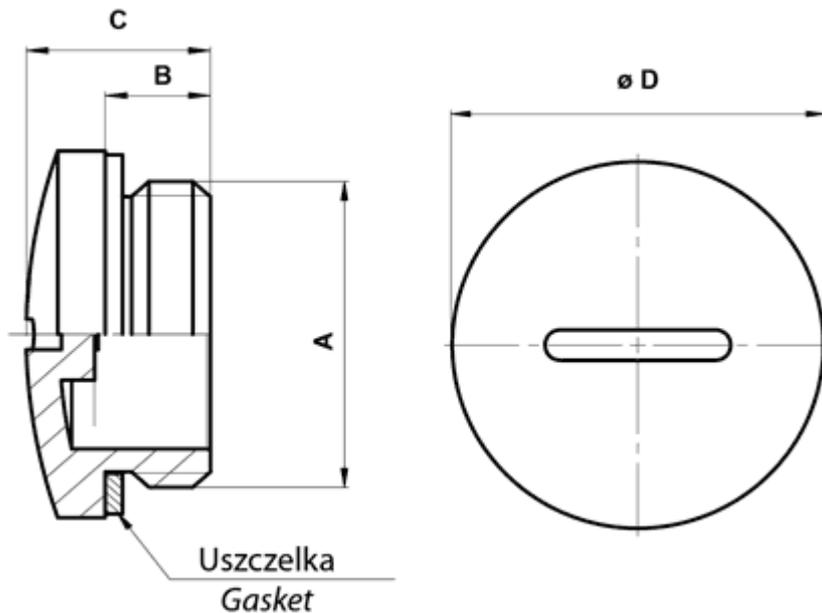

Details:

- **Material: Nylon 6**
- **Color: dark grey (RAL 7001), light grey (RAL 7035), black (RAL 9005)**
- Flammability: UL94V2
- Protection grade: IP65
- Working temperature: -30°C up to +100°C
- Metric as per EN 60423

Symbol	Metric thread A	B	C	D	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]				[szt./pcs]
8881AA117001	M12×1.5	6	10	15	PA 6	UL94 V-2	dark gray	100
8882AA117001	M16×1.5	6	10.5	20	PA 6	UL94 V-2	dark gray	100
8883AA117001	M20×1.5	6	10.5	24	PA 6	UL94 V-2	dark gray	100
8884AA117001	M25×1.5	8	13	30	PA 6	UL94 V-2	dark gray	100
8885AA117001	M32×1.5	8	13.5	37	PA 6	UL94 V-2	dark gray	100
8886AA117001	M40×1.5	8	14	46	PA 6	UL94 V-2	dark gray	50
8887AA117001	M50×1.5	10	16.5	56	PA 6	UL94 V-2	dark gray	50
8888AA117001	M63×1.5	12	17	70	PA 6	UL94 V-2	dark gray	50
8881AA117035	M12×1.5	6	10	15	PA 6	UL94 V-2	light gray	100
8882AA117035	M16×1.5	6	10.5	20	PA 6	UL94 V-2	light gray	100
8883AA117035	M20×1.5	6	10.5	24	PA 6	UL94 V-2	light gray	100
8884AA117035	M25×1.5	8	13	30	PA 6	UL94 V-2	light gray	100
8885AA117035	M32×1.5	8	13.5	37	PA 6	UL94 V-2	light gray	100
8886AA117035	M40×1.5	8	14	46	PA 6	UL94 V-2	light gray	50
8887AA117035	M50×1.5	10	16.5	56	PA 6	UL94 V-2	light gray	50

Symbol	Metric thread A	B	C	D	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]				[szt./pcs]
8888AA117035	M63×1.5	12	17	70	PA 6	UL94 V-2	light gray	50
8881AA019005	M12×1.5	6	10	15	PA 6	UL94 V-2	black	100
8882AA019005	M16×1.5	6	10.5	20	PA 6	UL94 V-2	black	100
8883AA019005	M20×1.5	6	10.5	24	PA 6	UL94 V-2	black	100
8884AA019005	M25×1.5	8	13	30	PA 6	UL94 V-2	black	100
8885AA019005	M32×1.5	8	13.5	37	PA 6	UL94 V-2	black	100
8886AA019005	M40×1.5	8	14	46	PA 6	UL94 V-2	black	50
8887AA019005	M50×1.5	10	16.5	56	PA 6	UL94 V-2	black	50
8888AA019005	M63×1.5	12	17	70	PA 6	UL94 V-2	black	50