


FP-9470 - PCB spacers

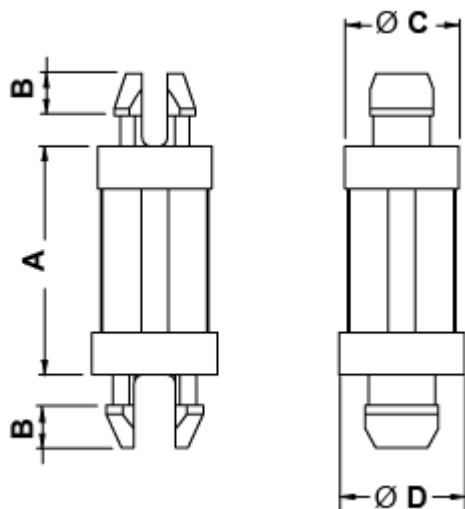

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top mounting hole dia.	Bottom mounting hole dia.	Top panel thickness	Bottom panel thickness
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
9470AA00	6.4	2.35	6.35	7	4	4	1.6	1.6
9471AA00	9.5	2.35	6.35	7	4	4	1.6	1.6
9472AA00	10	2.35	6.35	7	4	4	1.6	1.6
9473AA00	12.7	2.35	6.35	7	4	4	1.6	1.6
9474AA00	15.9	2.35	6.35	7	4	4	1.6	1.6
9475AA00	19.1	2.35	6.35	7	4	4	1.6	1.6
9476AA00	22.2	2.35	6.35	7	4	4	1.6	1.6
9477AA00	25.4	2.35	6.35	7	4	4	1.6	1.6
9486AA00	6.4	2.35	6.35	7	4	4.8	1.6	1.6
9487AA00	9.5	2.35	6.35	7	4	4.8	1.6	1.6
9488AA00	12.7	2.35	6.35	7	4	4.8	1.6	1.6
9489AA00	15.9	2.35	6.35	7	4	4.8	1.6	1.6
9490AA00	19.1	2.35	6.35	7	4	4.8	1.6	1.6
9491AA00	22.2	2.35	6.35	7	4	4.8	1.6	1.6
9492AA00	25.4	2.35	6.35	7	4	4.8	1.6	1.6
9494AA00	6.4	2.35	6.35	7.1	4.8	4.8	1.6	1.6
9495AA00	9.5	2.35	6.35	7.1	4.8	4.8	1.6	1.6
9496AA00	12.7	2.35	6.35	7.1	4.8	4.8	1.6	1.6
9497AA00	15.9	2.35	6.35	7.1	4.8	4.8	1.6	1.6
9498AA00	19.1	2.35	6.35	7.1	4.8	4.8	1.6	1.6
9499AA00	22.2	2.35	6.35	7.1	4.8	4.8	1.6	1.6
8915AA00	25.4	2.35	6.35	7.1	4.8	4.8	1.6	1.6