


FP-9899 - Wire and pipe clips - top open

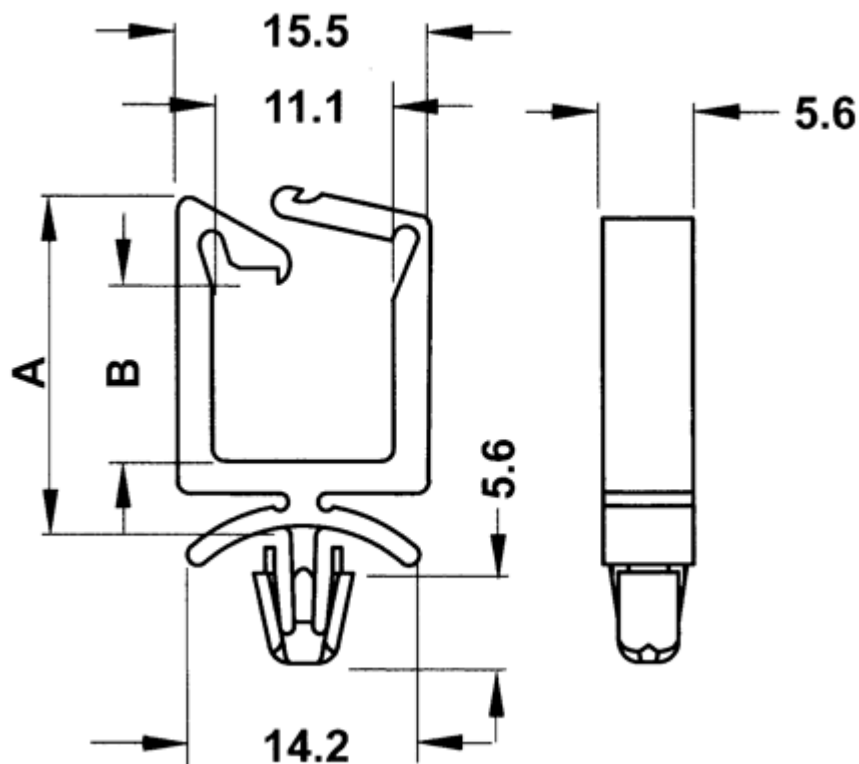

Details:

- **Material:** PA 6.6 UL94V2
- **Color:** natural
- Working temperature: -35°C - 85°C
- Standard pack: 1000 pcs

Symbol	A	B	C	D	E	F	G	Mounting hole diameter range	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
9899AA00	13	3.6	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
9900AA00	18	8.4	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
9901AA00	27.2	17.5	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
9902AA00	35.1	25.4	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
9903AA00	13	3.6	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	natural
9904AA00	18	8.4	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	natural
9905AA00	27.2	17.5	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	natural
9906AA00	35.1	25.4	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	natural
6579AA00	18	10.3	5.4	5.2	14.8	10.8	14.8	4.8 - 5.0	0.5 - 2.0	PA 66	UL94 V-2	natural
6580AA00	27.2	19.6	5.4	5.2	14.8	10.8	14.8	4.8 - 5.0	0.5 - 2.0	PA 66	UL94 V-2	natural