


FP-DLS01 - Dual locking PCB spacers

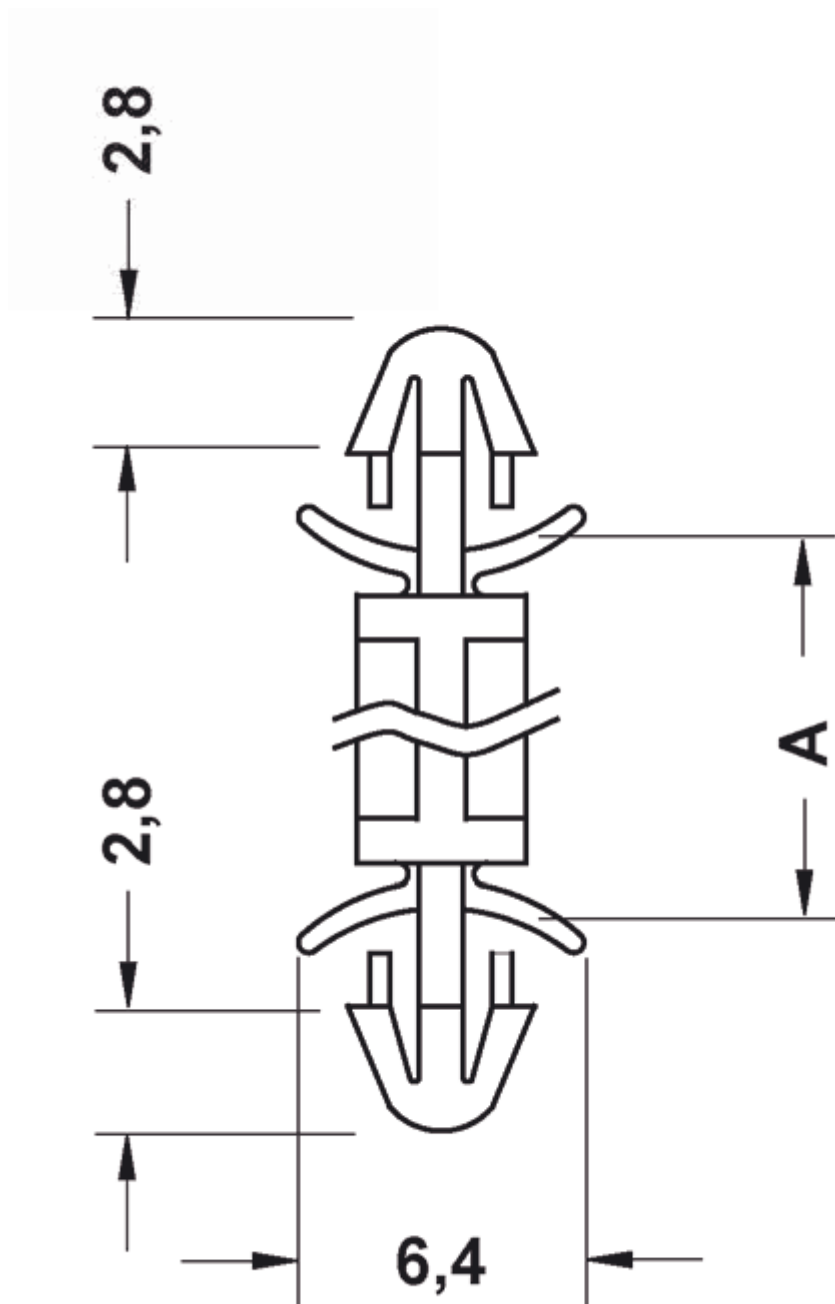

Details:

- **Material: PA66 UL94V2**
- **Color: natural**
- Working temperature: -35°C - 85°C
- Panel thickness: 1.2 - 2.0mm
- Standard pack: 1000 pcs

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
8393AA00	3.2	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8394AA00	4	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
8395AA00	5	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8396AA00	6.4	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8397AA00	7	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8398AA00	8	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8399AA00	9.5	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8400AA00	11.2	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8401AA00	12	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8402AA00	15	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8403AA00	16	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8404AA00	17	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8405AA00	20.2	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8406AA00	22.2	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural
8407AA00	25.4	3	1.2 - 2.0	3	1.2 - 2.0	PA 66	UL94 V-2	natural