


FP-DLS06 -

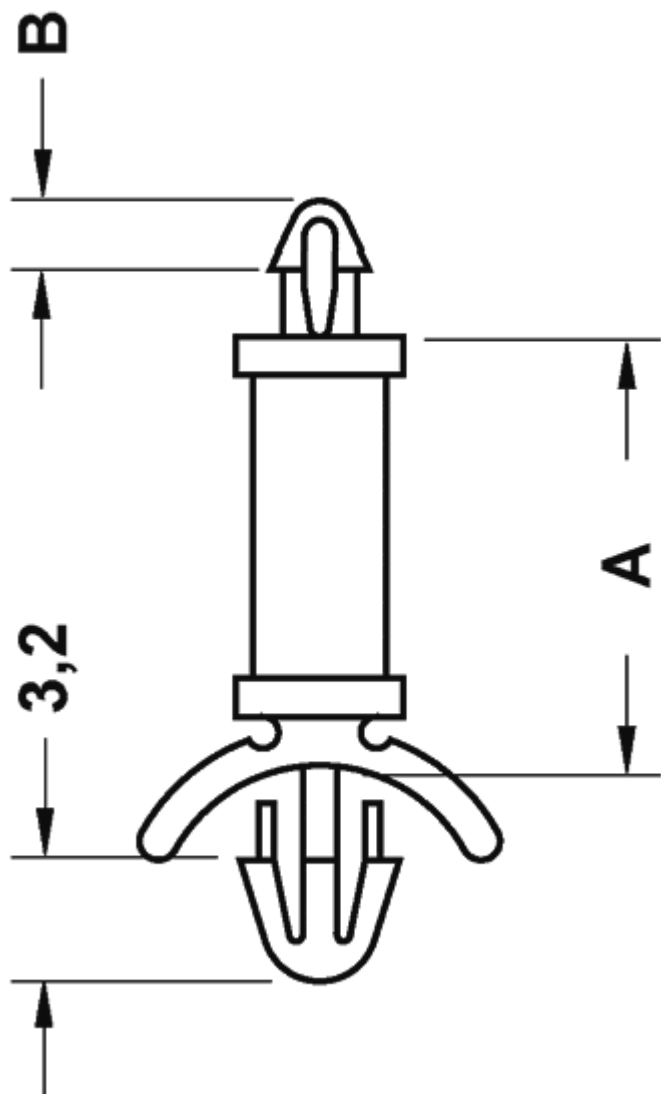

Details:

- **Material:** PA66 UL94V2, UL94V0 available by special request
- **Color:** natural
- **Top hole:** see table
- **Top panel thickness:** 1.8 mm
- **Bottom hole:** 3.0 - 3.2 mm
- **Bottom panel thickness:** 0.8 - 2.0 mm
- **Standard pack:** 1000 pcs

Symbol	Height A	B	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia. ±0.1	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
8376AA00	3.2	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8377AA00	4.8	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8378AA00	6.4	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8379AA00	7.9	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8380AA00	9.5	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural

Symbol	Height A	B	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia. ±0.1	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
8381AA00	11.1	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8382AA00	12.7	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8383AA00	14.3	1.8	2	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8384AA00	3.2	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8385AA00	4.8	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8386AA00	6.4	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8387AA00	7.9	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8388AA00	9.5	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8389AA00	11.1	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8390AA00	12.7	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8391AA00	14.3	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural
8392AA00	15.9	2	2.5	1.6	3.1	0.8 - 2.0	PA 66	UL94 V-2	natural