


FP-DLS51 - Dual locking PCB spacer

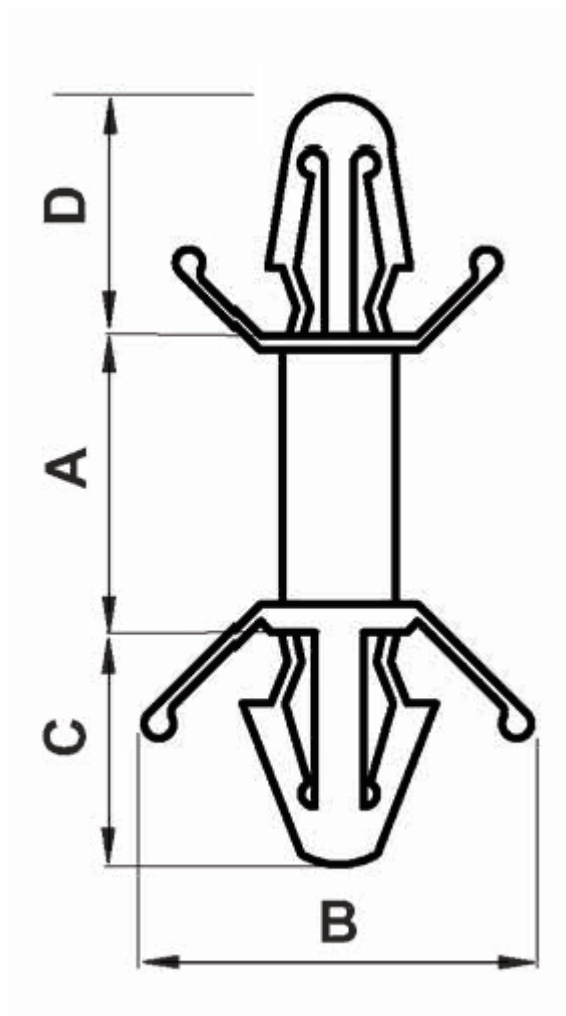

Details:

- **Material:** PA66 UL94V2
- **Color:** natural
- **Top panel thickness:** 1.8 mm
- **Bottom panel thickness:** 0.5 - 2.3 mm
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
2451AA00	4.6	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2452AA00	6.2	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2453AA00	9.2	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2454AA00	12.6	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2455AA00	15.9	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2456AA00	19.1	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2457AA00	22.1	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2458AA00	25.3	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural
2459AA00	28.6	14	7.6	5.9	4	1.8	4.8	0.5 - 2.3	PA 66	UL94 V-2	natural