
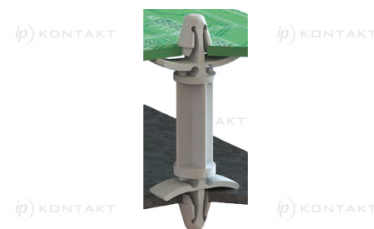


FP-DLS52 - Dual locking PCB spacer

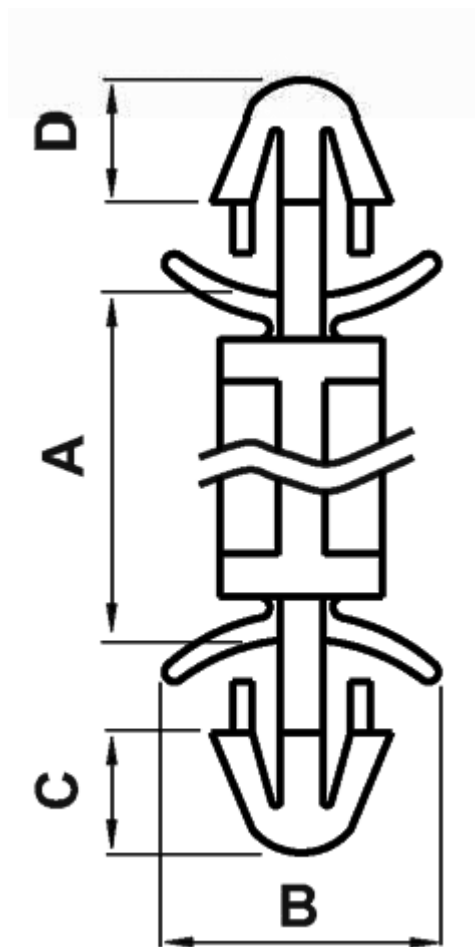

Details:

- **Material:** PA66 UL94V2
- **Color:** natural
- **Hole:** Ø4.8 mm
- **Panel thickness:** 1.5 - 2.6 mm
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
0686AA00	8.6	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural
0687AA00	11.7	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural
0688AA00	14.8	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural
0689AA00	18	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural
0690AA00	21.2	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural
0691AA00	24.2	14	4.9	4.9	4.8	1.5 - 2.6	4.8	1.5 - 2.6	PA 66	UL94 V-2	natural