


FP-DLS72 - Dual locking PCB spacer

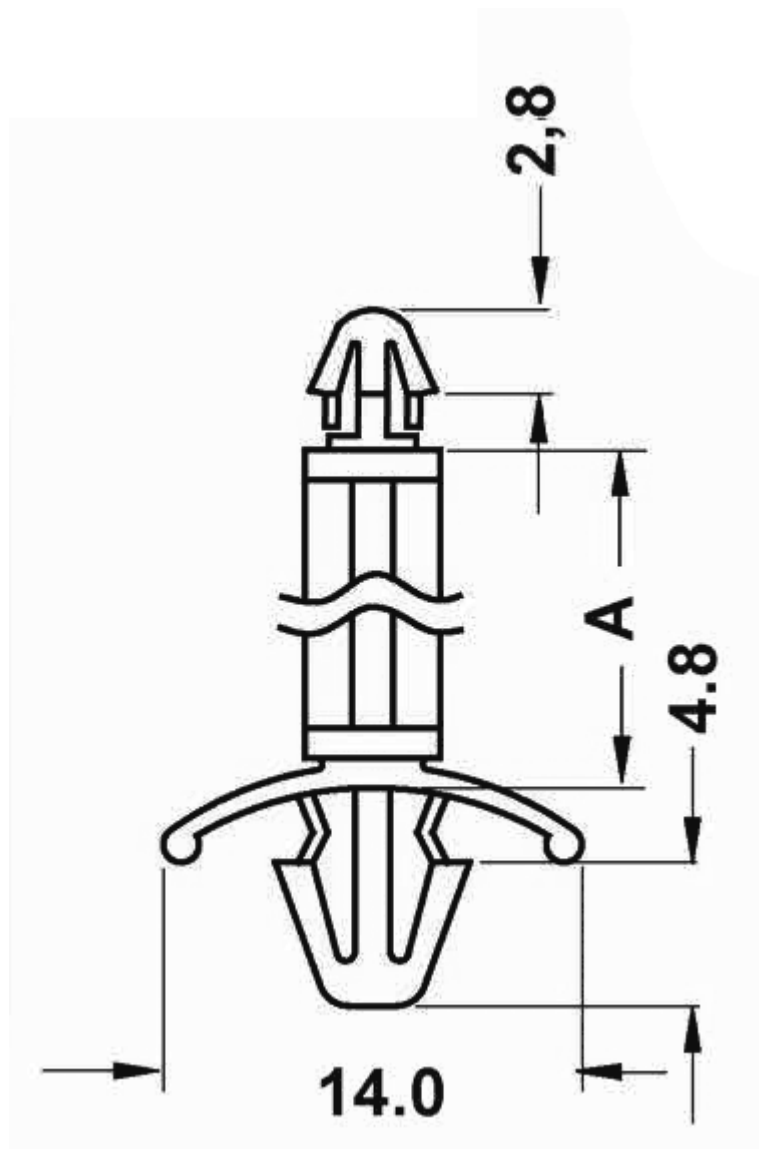

Details:

- **Material:** PA66 UL94V2
- **Color:** natural
- **Top panel thickness:** 1.2-1.7 mm
- **Bottom panel thickness:** 0.8 - 2.2 mm
- Standard pack: 1000 pcs

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
8418AA00	3.2	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8419AA00	4.8	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8420AA00	6.4	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8421AA00	8	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8422AA00	10	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8423AA00	12	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8424AA00	14	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural
8425AA00	16	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
8426AA00	18	3	1.2 - 1.7	3	0.8 - 2	PA 66	UL94 V-2	natural