
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

G-UMR - Cabinet tubular handle



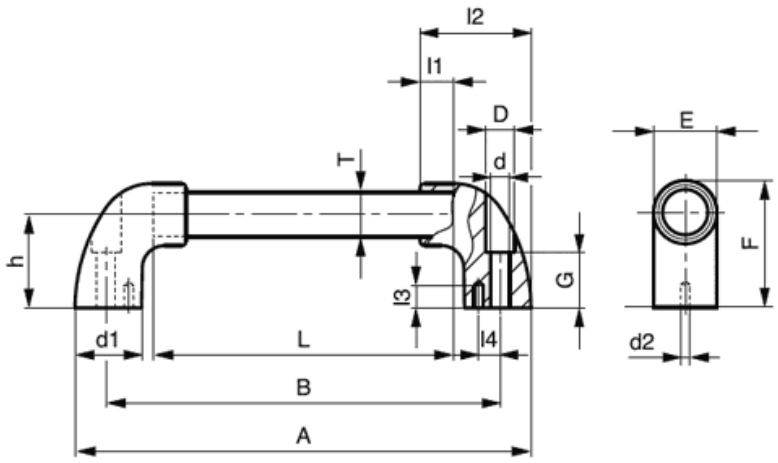

Details:

- **Material:**
  - **Handle legs of black mat thermoplastic, glass fiber reinforced**
  - **Handle tubing of aluminium 2 mm wall thickness in natural anodized finish**
- **Mounting bolts, nuts and washers at request**
- **Different tube lengths and legs colors also available**

Symbol	T	L	Mounting holes spacing B	A	F	l1	G	D	d	d1	h	l2	E	d2	l3	l4	Weight
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[g]
G-UMR-20-200	20	158	200	228	56	15	25	13	8.5	30	42	50	28	-	-	-	123
G-UMR-20-300	20	258	300	328	56	15	25	13	8.5	30	42	50	28	-	-	-	152
G-UMR-20-400	20	358	400	428	56	15	25	13	8.5	30	42	50	28	-	-	-	285
G-UMR-20-500	20	458	500	528	56	15	25	13	8.5	30	42	50	28	-	-	-	215
G-UMR-20-600	20	558	600	628	56	15	25	13	8.5	30	42	50	28	-	-	-	248
G-UMR-30-300	30	236	300	342	81	22	40	17	10.5	44	60	75	42	4	15	18	360
G-UMR-30-400	30	336	400	442	81	22	40	17	10.5	44	60	75	42	4	15	18	412
G-UMR-30-500	30	436	500	542	81	22	40	17	10.5	44	60	75	42	4	15	18	455
G-UMR-30-600	30	536	600	642	81	22	40	17	10.5	44	60	75	42	4	15	18	521