


H-2FYG - Thin heat shrink tube

ŚREDNICA PRZED
OBKURCZENIEM

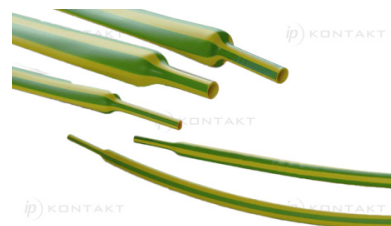

Details:

- Material: Crosslinked polyolefin
- Color: yellow-green stripes
- Elastic, fast heat shrink, excellent electrical properties
- UV resistant
- Operating temperature -55°C to 135°C
- Min. shrink temperature: 70°C
- Min. full shrink temperature: 100°C
- Zgodność:
 - 125°C VW-1 600V File No.E204071
 - SAE-AMS-DTL-23053/5 Class 1&3
 - RoHS
 - Sony-SS-00259

Symbol	Nominal diameter	Min. diameter before shrink	Max. diameter after shrink	Wall thickness	Length
	[in]	[mm]	[mm]	[mm]	[m]
H-2FYG-1.2	3/64	1.2	0.6	0.33	200
H-2FYG-1.6	1/16	1.6	0.8	0.36	150
H-2FYG-2.4	3/32	2.4	1.2	0.44	150
H-2FYG-3.2	1/8	3.2	1.6	0.44	150
H-2FYG-4.8	3/16	4.8	2.4	0.56	75
H-2FYG-6.4	1/4	6.4	3.2	0.56	75
H-2FYG-9.5	3/8	9.5	4.8	0.56	75
H-2FYG-12.7	1/2	12.7	6.4	0.65	50
H-2FYG-19.1	3/4	19.1	9.5	0.8	30
H-2FYG-25.4	1	25.4	12.7	0.9	30
H-2FYG-38.1	1.1/2	38.1	19.1	1.02	30
H-2FYG-50.8	2	50.8	25.4	1.02	30
H-2FYG-76.2	3	76.2	38.1	1.2	15
H-2FYG-101.6	4	101.6	50.8	1.3	15

Własności	Test	Wynik testu
Wytrzymałość	ASTM D 2671	>14MPa
Wydłużenie	ASTM D 2671	400%
Skurcz wzdłużny	UL 224	±5%
Mimośrodowość	ASTM D 2671	<30%
Starzenie cieplne	158°C/168 hrs	>12MPa >350%
Palność	VW-1	Niepalna
Wytrzymałość dielektryczna	IEC 243	>20kV/mm
Oporność skrośna	ASTM D 2671	>1014Ωcm
Zachowanie w kontakcie z Cu	ASTM D 2671	zaliczony
Korozja Cu	UL 224	Nie powoduje