


H-A -

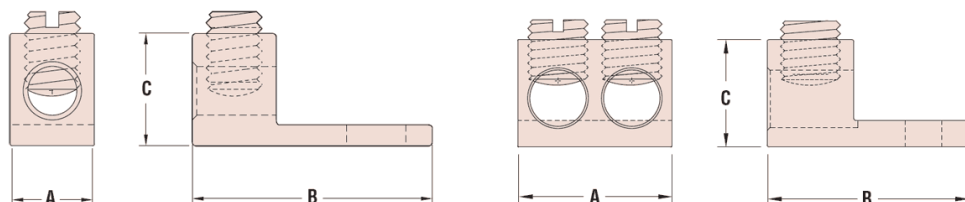

Details:

- **Material: 6061-T6 aluminium alloy UL94 V-0**
- Compact design-lightweight yet strong.
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Require no special installation tools.
- UL and CSA certified for use with copper and aluminum conductors.
- Ports are marked with catalog description and conductor range.
- DFARS Compliant

Symbol	AWG	A	B	C	Bolt size	Number of wires	Material
		[mm]	[mm]	[mm]	[mm]		
H-1863	4-14	12.7	26.9	12.7	6.4	1	aluminium
H-1864	2-14	12.7	29.5	14.2	6.4	1	aluminium
H-1884	1/0-14	15.9	37.3	19.8	6.4	1	aluminium
H-1864-2	2-14	23	29.5	14.2	6.4	2	aluminium
H-1884-2	1/0-14	28.4	37.3	19.8	6.4	2	aluminium