


H-B2 - Thin Panel Bushings

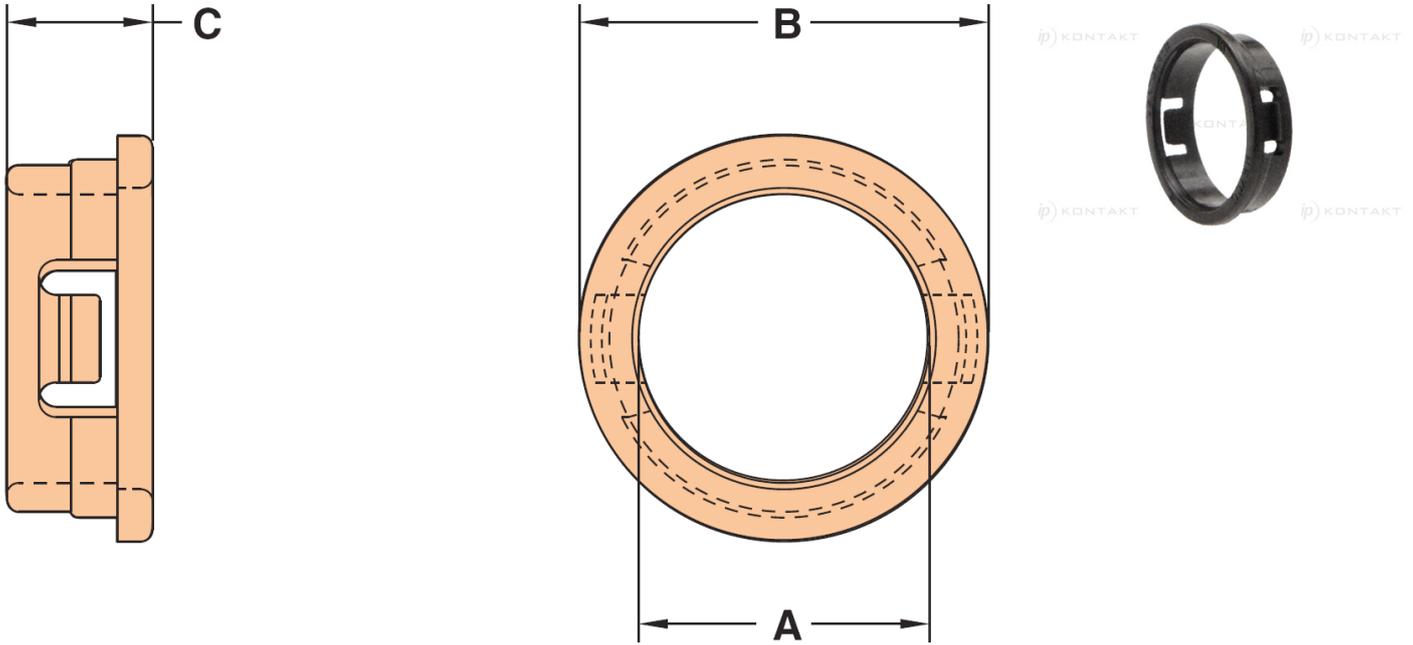

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (BLK) or white (WH)
- **Temperature Range:** -18°C to 105°C

Symbol	Mounting hole diameter	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2800	4.7	3.2	6.4	6	1.6 max.	PA 66	UL94 V-2	black
H-2801	4.7	3.2	6.4	6	1.6 max.	PA 66	UL94 V-2	white
H-2859	5.5	3.2	7.1	6	1.6 max.	PA 66	UL94 V-2	black
H-2860	5.5	3.2	7.1	6	1.6 max.	PA 66	UL94 V-2	white
H-2853	7.1	5.5	8.7	6	1.6 max.	PA 66	UL94 V-2	black
H-2854	7.1	5.5	8.7	6	1.6 max.	PA 66	UL94 V-2	white
H-2808	7.8	6.2	9.7	6	1.6 max.	PA 66	UL94 V-2	black
H-2809	7.8	6.2	9.7	6	1.6 max.	PA 66	UL94 V-2	white
H-2810	7.9	6.3	9.7	6	1.6 max.	PA 66	UL94 V-2	black
H-2811	7.9	6.3	9.7	6	1.6 max.	PA 66	UL94 V-2	white
H-2856	8.7	5.5	10.3	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2857	8.7	5.5	10.3	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2803	9.5	6.3	11.1	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2804	9.5	6.3	11.1	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2815	9.9	6.7	10.9	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2816	9.9	6.7	10.9	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2806	10.3	7.1	11.9	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2807	10.3	7.1	11.9	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2813	11.1	7.9	12.7	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2814	11.1	7.9	12.7	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2817	11.9	8.6	13.5	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2818	11.9	8.6	13.5	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2820	12.7	9.5	14.3	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2821	12.7	9.5	14.3	6.4	1.6 max.	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2822	13	9.5	14.3	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2823	13	9.5	14.3	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2824	13.5	10.3	15.1	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2825	13.5	10.3	15.1	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2833	15.1	11.9	16.7	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2834	15.1	11.9	16.7	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2827	15.9	12.7	17.9	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2828	15.9	12.7	17.9	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2832	17.4	14.4	19.3	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2835	17.4	14.4	19.3	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2836	19.1	15.9	21	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2837	19.1	15.9	21	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2844	19.8	15.9	21.8	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2845	19.8	15.9	21.8	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2850	22.2	19	24	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2851	22.2	19	24	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2847	25.4	22.3	27	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2848	25.4	22.3	27	6.4	1.6 max.	PA 66	UL94 V-2	white
H-2838	27.8	24.6	29.4	6.5	1.6 max.	PA 66	UL94 V-2	black
H-2839	27.8	24.6	29.4	6.5	1.6 max.	PA 66	UL94 V-2	white