
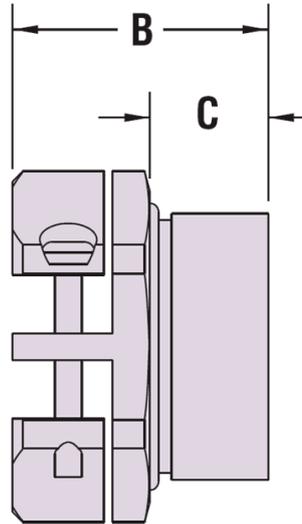


H-BCSR - Brass Clamping Strain Reliefs

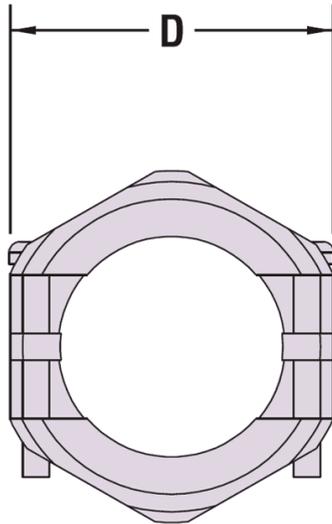

Details:

- **Material:**
 - **Body: nickel-plated brass**
 - **Screws: stainless steel**
- **Temperature Rating: -50°C to 300°C**
- **IP Rating: IP 20**
- Locknuts not included

Symbol	Thread	Cable diameter range [mm]	A	B	C	Wrench size D	Material
			[mm]	[mm]	[mm]	[mm]	
H-14884	M12x1.5	5.0 - 8.0	12	20	10	16	brass, nickel plated
H-14885	M16x1.5	6.0 - 10.5	16	21	10	19	brass, nickel plated
H-14886	M20x1.5	8.0 - 15.0	20	22	10	24	brass, nickel plated
H-14887	M25x1.5	12.5 - 20.5	25	24	11	30	brass, nickel plated
H-14888	M32x1.5	17.0 - 25.5	32	28	13	36	brass, nickel plated
H-14889	M40x1.5	24.0 - 33.0	40	30	13	46	brass, nickel plated
H-14875	PG7	4.0 - 8.0	12.5	15	6	17	brass, nickel plated
H-14876	PG9	6.0 - 10.0	15.2	17	6	20	brass, nickel plated
H-14877	PG11	6.0 - 12.0	18.6	17	6	22	brass, nickel plated
H-14878	PG13	7.0 - 15.0	21	18	7	24	brass, nickel plated
H-14879	PG16	9.0 - 17.0	22.5	19	7	27	brass, nickel plated
H-14880	PG21	12.0 - 22.0	28.3	22	8	35	brass, nickel plated
H-14881	PG29	18.0 - 30.0	37.3	23	8	42	brass, nickel plated
H-14882	PG36	24.0 - 36.0	47.6	28	10	55	brass, nickel plated