


H-BMLL - Standoff Loops - Blind Mount

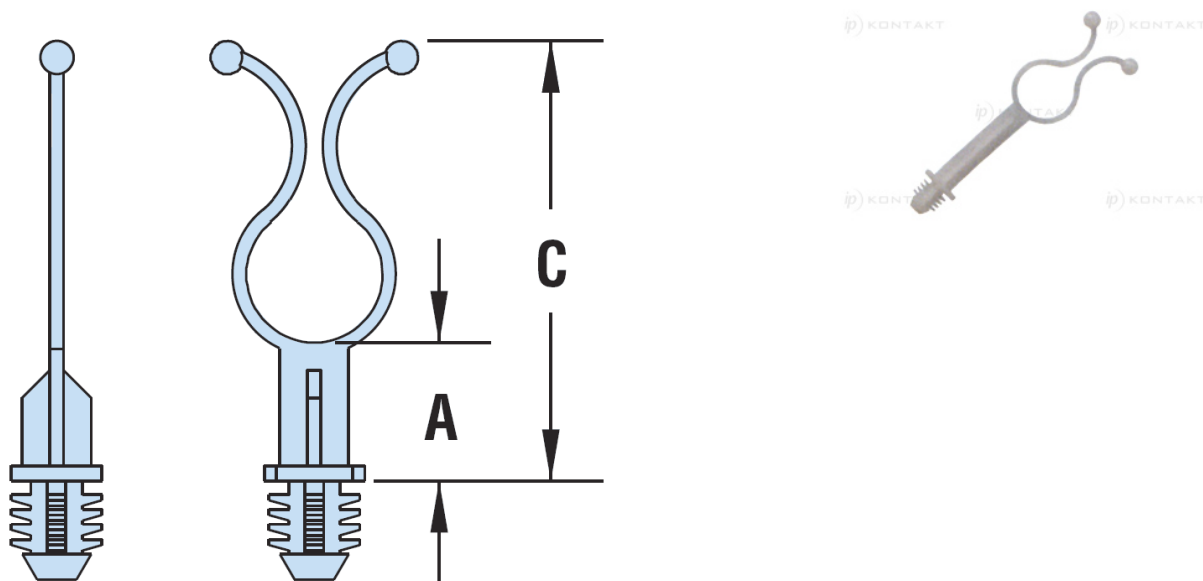

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: 0°C do 85°C
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.
- Minimum panel thickness: 6.4 mm

Symbol	Max. cable bundle diameter	A	C	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-4052M	7	4	23.1	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4052	7	4.8	23.9	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4053	7	12.7	31.8	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4260	7	19.1	38.2	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4056	10	4.8	27.9	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4057	10	12.7	35.8	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4261	10	19.1	42.2	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4175	12.5	4.8	32.5	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4176	12.5	12.7	40.4	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4177	12.5	19.1	46.8	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4180M	15	4	36.5	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4180	15	4.8	37.3	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4181	15	12.7	45.2	7.9	6.4 min.	PA 66	UL94 V-2	natural
H-4182	15	19.1	51.6	7.9	6.4 min.	PA 66	UL94 V-2	natural