


H-BR - Blunt rivets

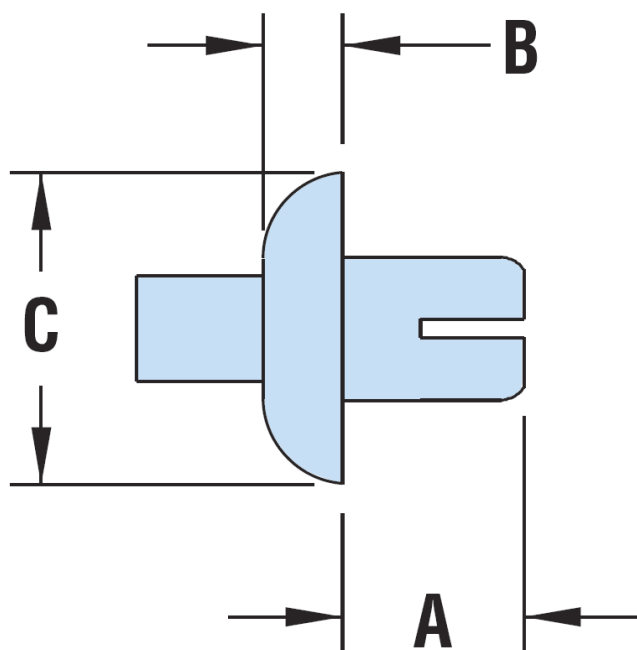

Details:

- **Material:** Nylon 6
- **Colour:** black or white
- Flammability Rating: UL94 V-2
- Temperature Range: -40°C to 115°C

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-13350	3.1	2.0 - 3.0	4.5	2	5.8	PA 6	UL94 V-2	black
H-13351	3.1	2.0 - 3.0	4.5	2	5.8	PA 6	UL94 V-2	white
H-13352	3.1	3.0 - 4.0	5.5	2	5.8	PA 6	UL94 V-2	black
H-13353	3.1	3.0 - 4.0	5.5	2	5.8	PA 6	UL94 V-2	white
H-9141	4.1	2.5 - 3.5	5	2.2	8	PA 6	UL94 V-2	black
H-9142	4.1	2.5 - 3.5	5	2.2	8	PA 6	UL94 V-2	white
H-13356	4.1	3.5 - 4.5	6	2.2	8	PA 6	UL94 V-2	black
H-13357	4.1	3.5 - 4.5	6	2.2	8	PA 6	UL94 V-2	white
H-13368	5.1	6.0 - 7.0	9	2.8	9.5	PA 6	UL94 V-2	black
H-13369	5.1	6.0 - 7.0	9	2.8	9.5	PA 6	UL94 V-2	white
H-13370	5.1	7.0 - 8.0	10	2.8	9.5	PA 6	UL94 V-2	black
H-13371	5.1	7.0 - 8.0	10	2.8	9.5	PA 6	UL94 V-2	white
H-13360	5.1	2.0 - 3.0	5	2.8	9.5	PA 6	UL94 V-2	black
H-13361	5.1	2.0 - 3.0	5	2.8	9.5	PA 6	UL94 V-2	white
H-13362	5.1	3.0 - 4.0	6	2.8	9.5	PA 6	UL94 V-2	black
H-13363	5.1	3.0 - 4.0	6	2.8	9.5	PA 6	UL94 V-2	white
H-13364	5.1	4.0 - 5.0	7	2.8	9.5	PA 6	UL94 V-2	black
H-13365	5.1	4.0 - 5.0	7	2.8	9.5	PA 6	UL94 V-2	white
H-13366	5.1	5.0 - 6.0	8	2.8	9.5	PA 6	UL94 V-2	black
H-13367	5.1	5.0 - 6.0	8	2.8	9.5	PA 6	UL94 V-2	white