


H-BRASS-TP - Nickel plated threaded plugs

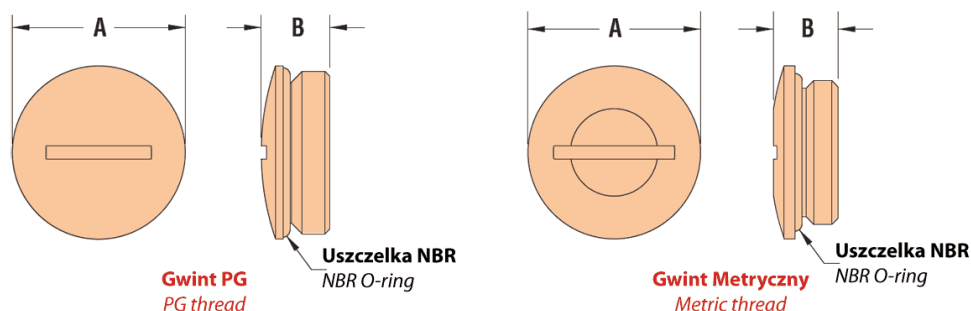

Details:

- **Material:** brass, nickel plated, NBR O-ring
- **IP rating:** IP 68
- **Temperature Range:** -40°C to 100°C

Symbol	Ext. thread	Ext. diameter A	Height B	Material
		[mm]	[mm]	
H-13397	M6	9	8	brass, nickel plated
H-13398	M8	10	8	brass, nickel plated
H-13399	M10	12	8	brass, nickel plated
H-13403	M12×1.5	14	8	brass, nickel plated
H-13404	M16×1.5	19	8	brass, nickel plated
H-13406	M20×1.5	24	9	brass, nickel plated
H-13408	M25×1.5	28	11	brass, nickel plated
H-13409	M32×1.5	35	12	brass, nickel plated
H-13410	M40×1.5	45	14	brass, nickel plated
H-13411	M50×1.5	55	15	brass, nickel plated
H-13413	M63×1.5	70	16	brass, nickel plated
H-13405	PG 7	14	8	brass, nickel plated
H-13407	PG 9	17	9	brass, nickel plated
H-13402	PG 11	20	9	brass, nickel plated
H-13412	PG 13	22	9.5	brass, nickel plated
H-13414	PG 16	24	9.5	brass, nickel plated
H-13416	PG 21	30	11	brass, nickel plated
H-13418	PG 29	39	12	brass, nickel plated
H-13415	PG 36	50	15	brass, nickel plated
H-13400	PG 42	60	16	brass, nickel plated
H-13417	PG 48	65	16	brass, nickel plated

H-13397, H-13398, H-13399 - Metric coarse-pitch thread