IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-CC - Nylon Cable Clamp

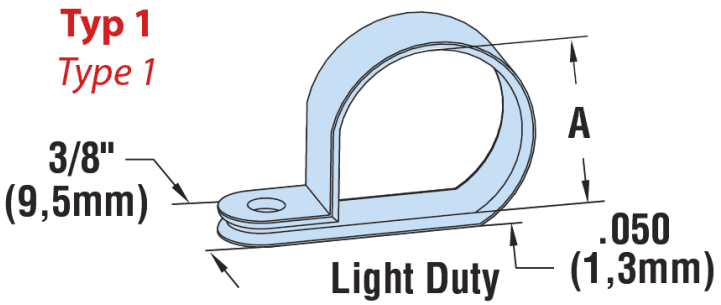

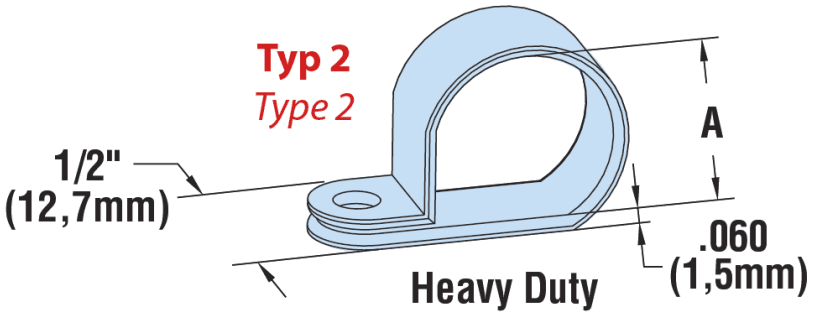

Details:

- **Material: Nylon 6/6 UL94 V-2**
- UL94 V-0 material available on special order
- **Colour: black (BLK) or natural (NAT)**
- Temperature range:
  - Black: 0°C to 105°C
  - Natural: 0°C to 85°C
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- All parts are size marked in inches and millimeters
- Type 1 - light duty, Type 2 - heavy duty
- Certifications: Recognized under the Component Program of Underwriters' Laboratories File E54523

Symbol	Mounting hole diameter	Max. cable bundle diameter A	Width	Thickness	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-3362	4.3	3.2	9.5	1.3	1	PA 66	UL94 V-2	black
H-3312	4.3	3.2	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3363	4.3	4.7	9.5	1.3	1	PA 66	UL94 V-2	black
H-3313	4.3	4.7	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3364	4.3	6.3	9.5	1.3	1	PA 66	UL94 V-2	black
H-3314	4.3	6.3	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3365	4.3	7.9	9.5	1.3	1	PA 66	UL94 V-2	black
H-3315	4.3	7.9	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3366	4.3	9.5	9.5	1.3	1	PA 66	UL94 V-2	black
H-3316	4.3	9.5	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3367	4.3	11.1	9.5	1.3	1	PA 66	UL94 V-2	black
H-3317	4.3	11.1	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3368	4.3	12.7	9.5	1.3	1	PA 66	UL94 V-2	black
H-3318	4.3	12.7	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3352	5.2	3.2	9.5	1.3	1	PA 66	UL94 V-2	black
H-3302	5.2	3.2	9.5	1.3	1	PA 66	UL94 V-2	natural

Symbol	Mounting hole diameter	Max. cable bundle diameter A	Width	Thickness	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-3372	5.2	3.2	12.7	1.5	2	PA 66	UL94 V-2	black
H-3322	5.2	3.2	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3353	5.2	4.7	9.5	1.3	1	PA 66	UL94 V-2	black
H-3303	5.2	4.7	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3373	5.2	4.7	12.7	1.5	2	PA 66	UL94 V-2	black
H-3323	5.2	4.7	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3354	5.2	6.3	9.5	1.3	1	PA 66	UL94 V-2	black
H-3304	5.2	6.3	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3374	5.2	6.3	12.7	1.5	2	PA 66	UL94 V-2	black
H-3324	5.2	6.3	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3355	5.2	7.9	9.5	1.3	1	PA 66	UL94 V-2	black
H-3305	5.2	7.9	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3375	5.2	7.9	12.7	1.5	2	PA 66	UL94 V-2	black
H-3325	5.2	7.9	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3356	5.2	9.5	9.5	1.3	1	PA 66	UL94 V-2	black
H-3306	5.2	9.5	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3376	5.2	9.5	12.7	1.5	2	PA 66	UL94 V-2	black
H-3326	5.2	9.5	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3357	5.2	11.1	9.5	1.3	1	PA 66	UL94 V-2	black
H-3307	5.2	11.1	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3377	5.2	11.1	12.7	1.5	2	PA 66	UL94 V-2	black
H-3327	5.2	11.1	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3358	5.2	12.7	9.5	1.3	1	PA 66	UL94 V-2	black
H-3308	5.2	12.7	9.5	1.3	1	PA 66	UL94 V-2	natural
H-3378	5.2	12.7	12.7	1.5	2	PA 66	UL94 V-2	black
H-3328	5.2	12.7	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3379	5.2	14.3	12.7	1.5	2	PA 66	UL94 V-2	black
H-3329	5.2	14.3	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3380	5.2	15.9	12.7	1.5	2	PA 66	UL94 V-2	black
H-3330	5.2	15.9	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3381	5.2	17.4	12.7	1.5	2	PA 66	UL94 V-2	black
H-3331	5.2	17.4	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3382	5.2	19.1	12.7	1.5	2	PA 66	UL94 V-2	black
H-3332	5.2	19.1	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3383	5.2	20.6	12.7	1.5	2	PA 66	UL94 V-2	black
H-3333	5.2	20.6	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3384	5.2	22.2	12.7	1.5	2	PA 66	UL94 V-2	black
H-3334	5.2	22.2	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3390	5.2	25.4	12.7	1.5	2	PA 66	UL94 V-2	black
H-3340	5.2	25.4	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3392	5.2	28.6	12.7	1.5	2	PA 66	UL94 V-2	black
H-3342	5.2	28.6	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3393	5.2	30.1	12.7	1.5	2	PA 66	UL94 V-2	black
H-3343	5.2	30.1	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3394	5.2	31.8	12.7	1.5	2	PA 66	UL94 V-2	black
H-3344	5.2	31.8	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3396	5.2	34.9	12.7	1.5	2	PA 66	UL94 V-2	black
H-3346	5.2	34.9	12.7	1.5	2	PA 66	UL94 V-2	natural
H-3398	5.2	38.1	12.7	1.5	2	PA 66	UL94 V-2	black
H-3348	5.2	38.1	12.7	1.5	2	PA 66	UL94 V-2	natural