
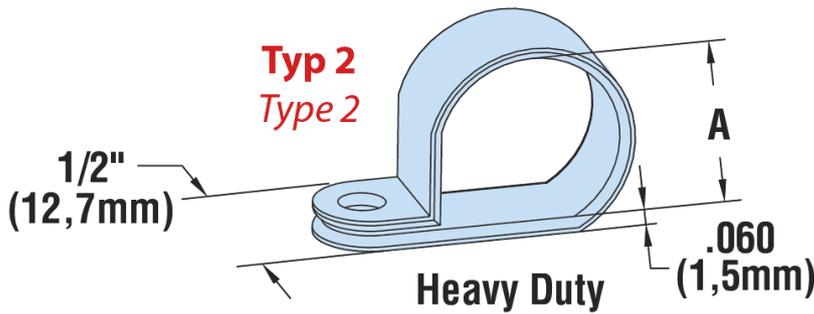


H-CC - Nylon Cable Clamp

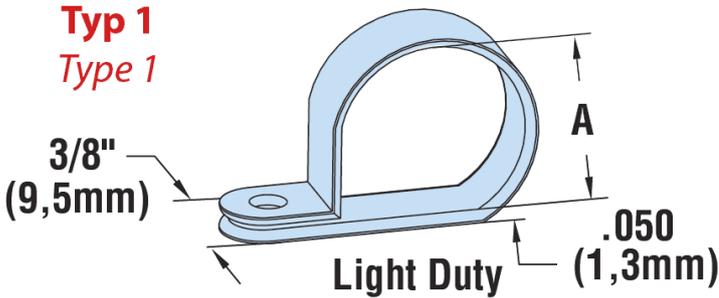

Details:

- **Material: Nylon 6/6 UL94 V-2**
- UL94 V-0 material available on special order
- **Colour: black (BLK) or natural (NAT)**
- Temperature range:
 - Black: 0°C to 105°C
 - Natural: 0°C to 85°C
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- All parts are size marked in inches and millimeters
- Type 1 - light duty, Type 2 - heavy duty
- Certifications: Recognized under the Component Program of Underwriters' Laboratories File E54523

| Symbol | Mounting hole diameter | Max. cable bundle diameter A | Width | Thickness | Type | Material | Flammability | Color |
|--------|------------------------|---------------------------------|-------|-----------|------|----------|--------------|---------|
| | [mm] | [mm] | [mm] | [mm] | | | | |
| H-3362 | 4.3 | 3.2 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3312 | 4.3 | 3.2 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3363 | 4.3 | 4.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3313 | 4.3 | 4.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3364 | 4.3 | 6.3 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3314 | 4.3 | 6.3 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3365 | 4.3 | 7.9 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3315 | 4.3 | 7.9 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3366 | 4.3 | 9.5 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3316 | 4.3 | 9.5 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3367 | 4.3 | 11.1 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3317 | 4.3 | 11.1 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3368 | 4.3 | 12.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3318 | 4.3 | 12.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3352 | 5.2 | 3.2 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3302 | 5.2 | 3.2 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |

| Symbol | Mounting hole diameter | Max. cable bundle diameter A | Width | Thickness | Type | Material | Flammability | Color |
|--------|------------------------|---------------------------------|-------|-----------|------|----------|--------------|---------|
| | [mm] | [mm] | [mm] | [mm] | | | | |
| H-3372 | 5.2 | 3.2 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3322 | 5.2 | 3.2 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3353 | 5.2 | 4.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3303 | 5.2 | 4.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3373 | 5.2 | 4.7 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3323 | 5.2 | 4.7 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3354 | 5.2 | 6.3 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3304 | 5.2 | 6.3 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3374 | 5.2 | 6.3 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3324 | 5.2 | 6.3 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3355 | 5.2 | 7.9 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3305 | 5.2 | 7.9 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3375 | 5.2 | 7.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3325 | 5.2 | 7.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3356 | 5.2 | 9.5 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3306 | 5.2 | 9.5 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3376 | 5.2 | 9.5 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3326 | 5.2 | 9.5 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3357 | 5.2 | 11.1 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3307 | 5.2 | 11.1 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3377 | 5.2 | 11.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3327 | 5.2 | 11.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3358 | 5.2 | 12.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | black |
| H-3308 | 5.2 | 12.7 | 9.5 | 1.3 | 1 | PA 66 | UL94 V-2 | natural |
| H-3378 | 5.2 | 12.7 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3328 | 5.2 | 12.7 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3379 | 5.2 | 14.3 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3329 | 5.2 | 14.3 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3380 | 5.2 | 15.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3330 | 5.2 | 15.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3381 | 5.2 | 17.4 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3331 | 5.2 | 17.4 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3382 | 5.2 | 19.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3332 | 5.2 | 19.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3383 | 5.2 | 20.6 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3333 | 5.2 | 20.6 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3384 | 5.2 | 22.2 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3334 | 5.2 | 22.2 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3390 | 5.2 | 25.4 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3340 | 5.2 | 25.4 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3392 | 5.2 | 28.6 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3342 | 5.2 | 28.6 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3393 | 5.2 | 30.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3343 | 5.2 | 30.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3394 | 5.2 | 31.8 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3344 | 5.2 | 31.8 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3396 | 5.2 | 34.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3346 | 5.2 | 34.9 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |
| H-3398 | 5.2 | 38.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | black |
| H-3348 | 5.2 | 38.1 | 12.7 | 1.5 | 2 | PA 66 | UL94 V-2 | natural |