




H-CH-LK - Lockit™ Cable Holders - Arrowhead Mount

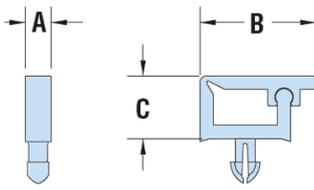

Typ 1
Type 1

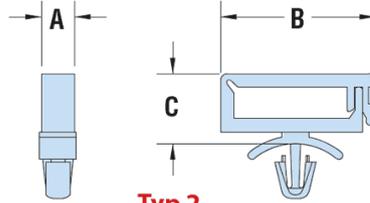

Typ 2
Type 2

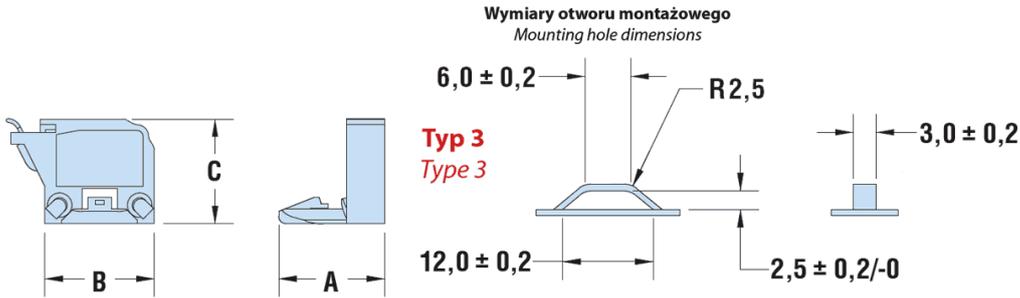

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Material Nylon 6/6 UL94 V-0 available on special order**
- **Type 3 standard is Nylon 6/6 UL94 V-0**
- **Colour:** natural
- **Temperature Range:** 0°C do 85°C

Symbol	Wire width	Wire height	C	A	B	Mounting hole diameter	Panel thickness	Type	Material	Flammability	Color
	[mm]	[mm]									
H-3310	2.9	4.8	4.9	2	8.7	1.6	1.6	1	PA 66	UL94 V-2	natural
H-3311	3.7	13.1	9	5	19.6	3.5	1.6	2	PA 66	UL94 V-2	natural
H-3345	3.7	13.5	9.5	5	19.6	4.8	1.6	2	PA 66	UL94 V-2	natural
H-3319	4.8	10.7	10.6	5	17.4	4.8	1.6	2	PA 66	UL94 V-2	natural
H-3320	8.8	10.7	14.6	5	17.4	4.8	1.6	2	PA 66	UL94 V-2	natural
H-3321	10	16.1	15.8	5	22.3	4.8	1.6	2	PA 66	UL94 V-2	natural
H-3391	18	21.7	27.3	5	24.3	4.8	1.6	2	PA 66	UL94 V-2	natural
H-3347	14.1	16.3	19.8	5	22.6	4.8	3.2	2	PA 66	UL94 V-2	natural
H-12162F	7.2	11.6	14.4	14	14.6	-	-	3	PA 66	UL94 V-2	natural