




**H-CH-RA -**

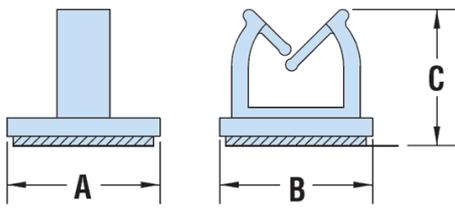


**Typ 1**  
Type 1

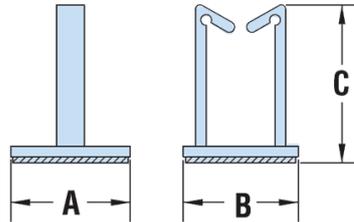

**Typ 2**  
Type 2

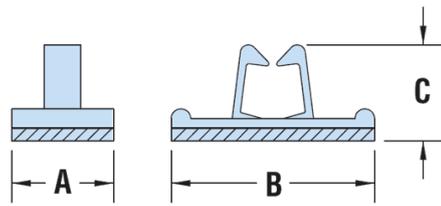

**Typ 3**  
Type 3

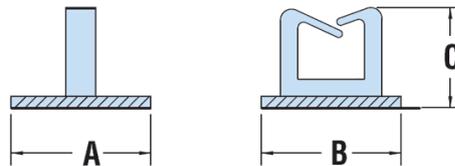

**Typ 4**  
Type 4

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Material Nylon 6/6 UL94 V-0 available on special order**
- **Colour: natural**
- **Temperature Range: 0°C do 85°C**

Symbol	Wire width	Wire height	C	A	B	Type	Material	Flammability	Color
	[mm]	[mm]							
H-4271	4.4	3	7.9	9.5	9.5	4	PA 66	UL94 V-2	natural
H-4212	4.6	1	6.5	9.4	9.4	1	PA 66	UL94 V-2	natural
H-4213	4.6	2.8	8.3	9.4	9.4	1	PA 66	UL94 V-2	natural
H-4214	6.4	3.2	10.2	12.7	12.7	1	PA 66	UL94 V-2	natural
H-4215	7.9	4.1	11.9	12.7	12.7	1	PA 66	UL94 V-2	natural
H-4216	8.9	6.1	14.1	12.7	12.7	1	PA 66	UL94 V-2	natural
H-4217	8.9	7.9	15.7	12.7	12.7	1	PA 66	UL94 V-2	natural
H-3603	11.4	4.7	11.9	19.3	18.8	2	PA 66	UL94 V-2	natural
H-3608	11.4	9.5	17.2	19.3	18.8	2	PA 66	UL94 V-2	natural
H-3613	11.4	19	26.7	19.3	18.8	2	PA 66	UL94 V-2	natural
H-3614	7.4	6.4	12.1	12.7	25.4	3	PA 66	UL94 V-2	natural