
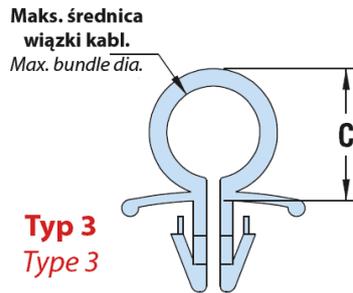



H-CH-SD - Split Dart Cable Holders



Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** -40°C do 85°C

Symbol	Max. cable bundle diameter	Mounting hole diameter	C	Panel thickness range	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-12379	3.8	6.5	8.9	1.2 max.	1	PA 66	UL94 V-2	natural
H-12387	2.9	4.5	6.4	1.6 max.	2	PA 66	UL94 V-2	natural
H-12386	3.8	6.5	8.9	1.6 max.	1	PA 66	UL94 V-2	natural
H-12380	8.4	5.5	10.9	1.6 max.	3	PA 66	UL94 V-2	natural
H-12381	8.4	6	11.9	1.6 max.	3	PA 66	UL94 V-2	natural
H-12382	11.1	6	14	1.9 max.	3	PA 66	UL94 V-2	natural
H-12383	5	6.5	8.1	2.0 max.	3	PA 66	UL94 V-2	natural
H-12384	5.5	5.5	7.9	2.0 max.	3	PA 66	UL94 V-2	natural
H-12385	7.5	5.5	9.7	2.0 max.	3	PA 66	UL94 V-2	natural