


H-DD - Double D Hole Plugs

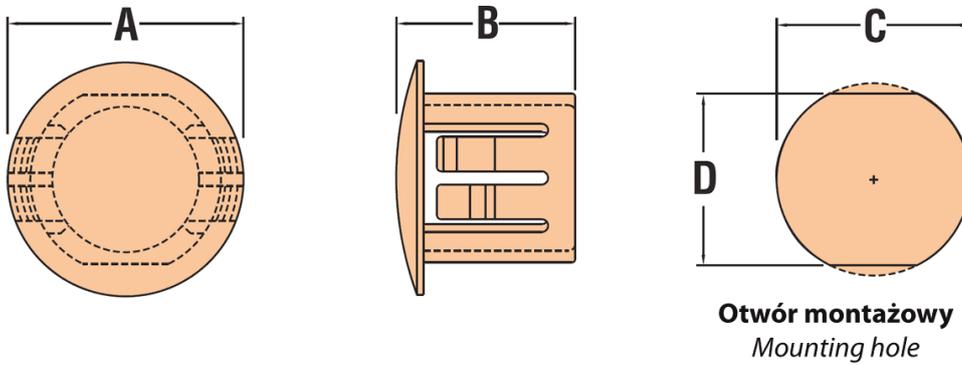

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black (BLK) or white (WH)**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579
- Multiple panel thickness design
- Convex, matte finish
- H-2617 i H-2618 - On installation, Locking Fingers must be aligned with Mounting Hole Flats
- H-2511 - Smaller than standard Head Diameter, for clearance situations.

Symbol	Mounting hole diameter C	D	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]				[mm]			
H-2488	11.1	9.9	13.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2489	11.1	9.9	13.5	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2491	12.7	11.3	14.7	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2492	12.7	11.3	14.7	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2494	14.3	13.5	16.7	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2495	14.3	13.5	16.7	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2497	15.9	14	18.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2498	15.9	14	18.5	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2503	19.1	15.9	23.4	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2504	19.1	15.9	23.4	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2509	22.2	19.5	25.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2510	22.2	19.5	25.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2511	22.2	19.5	23.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2717	28.2	25.4	30.9	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2718	28.2	25.4	30.9	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2959	50.8	47.6	55.1	12.1	3.2 max.	PA 66	UL94 V-2	black
H-2963	50.8	47.6	55.1	12.1	3.2 max.	PA 66	UL94 V-2	white