


H-DP - Dome plugs

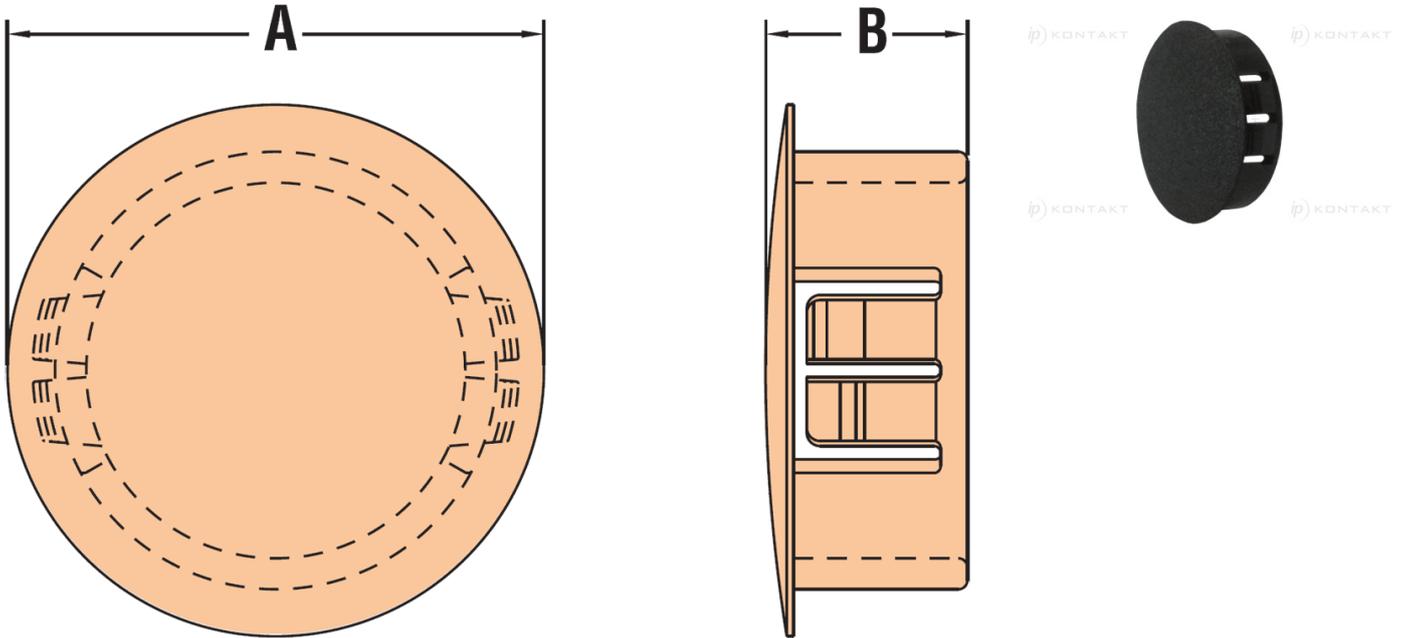

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black or white (other colours available on special order)**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]						
H-2590		6.4	5.9	1.6 max.	PA 66	UL94 V-2	black
H-2591		6.4	5.9	1.6 max.	PA 66	UL94 V-2	white
H-2607		7.9	7.9	1.0 max.	PA 66	UL94 V-2	black
H-2608		7.9	7.9	1.0 max.	PA 66	UL94 V-2	white
H-2603		7.9	7.9	1.6 max.	PA 66	UL94 V-2	black
H-2604		7.9	7.9	1.6 max.	PA 66	UL94 V-2	white
H-2613		9.5	7.9	1.6 max.	PA 66	UL94 V-2	black
H-2614		9.5	7.9	1.6 max.	PA 66	UL94 V-2	white
H-2617		11.9	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2618		11.9	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2633		13.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2634		13.5	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2643		14.2	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2644		14.2	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2653		16.7	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2654		16.7	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2663		18.2	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2664		18.2	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2673		19.8	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2674		19.8	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2683		23.4	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2684		23.4	10.3	3.2 max.	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-2693		25.1	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2694		25.1	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2703		25.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2704		25.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2713		30.6	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2714		30.6	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2723		30.9	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2724		30.9	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2733		33.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2734		33.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2740		34.9	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2741		34.9	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2753		38.1	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2754		38.1	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2763		42.4	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2764		42.4	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2276		45.7	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2277		45.7	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2773		48.7	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2774		48.7	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2291		52.1	11.9	3.2 max.	PA 66	UL94 V-2	black
H-2292		52.1	11.9	3.2 max.	PA 66	UL94 V-2	white
H-2783		55.1	11.9	3.2 max.	PA 66	UL94 V-2	black
H-2784		55.1	11.9	3.2 max.	PA 66	UL94 V-2	white
H-2403		59.9	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2404		59.9	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2411		63	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2412		63	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2790		68.8	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2791		68.8	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2455		80.3	18.8	6.4 max.	PA 66	UL94 V-2	black
H-2456		80.3	18.8	6.4 max.	PA 66	UL94 V-2	white
H-2482		92.9	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2483		92.9	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2464		92.9	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2465		92.9	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2473		105.8	18	6.4 max.	PA 66	UL94 V-2	black
H-2474		105.8	18	6.4 max.	PA 66	UL94 V-2	white
H-2451		133	19.1	6.4 max.	PA 66	UL94 V-2	black
H-2452		133	19.1	6.4 max.	PA 66	UL94 V-2	white
H-2453		157.9	19.8	6.4 max.	PA 66	UL94 V-2	black
H-2454		157.9	19.8	6.4 max.	PA 66	UL94 V-2	white