


## H-DPT -

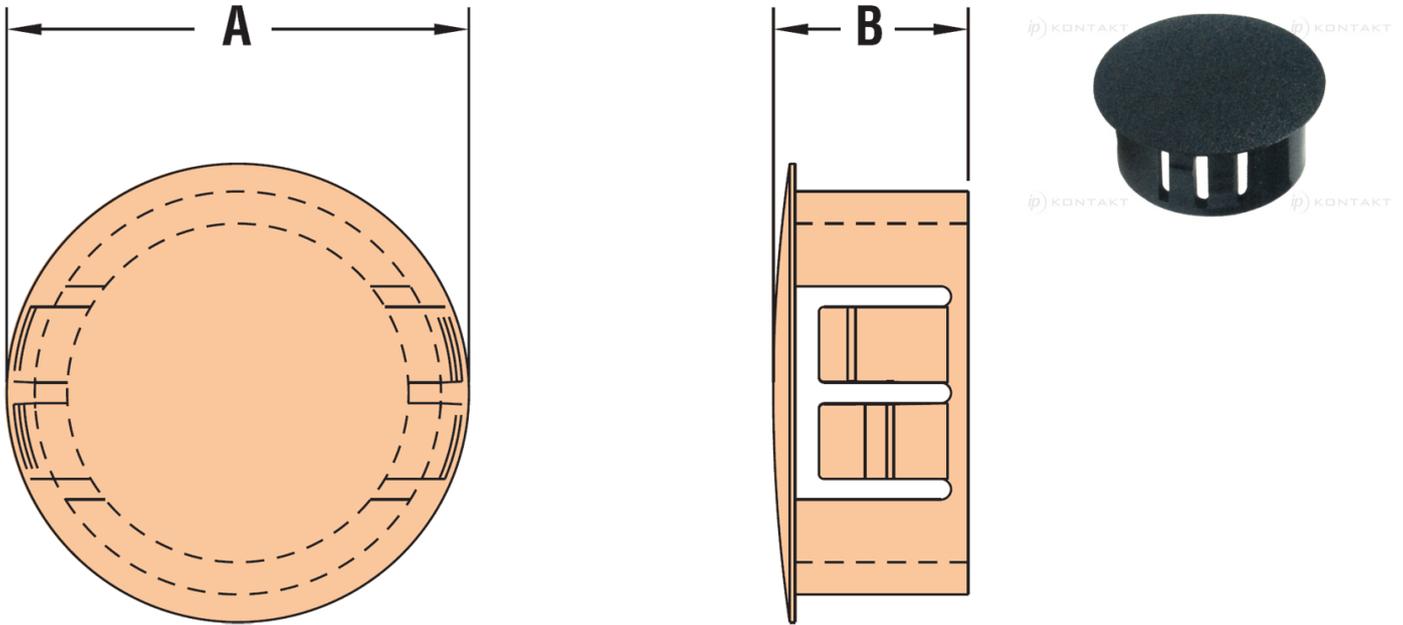

### Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black or white (other colours available on special order)**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Convex, matte finish
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Approximate Head Thickness: 1.6 mm. Thickness may vary.

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]			[mm]			
H-2624	9.5	11.9	10.3	3.2 - 4.4	PA 66	UL94 V-2	black
H-2625	9.5	11.9	10.3	3.2 - 4.4	PA 66	UL94 V-2	white
H-3004	12.7	14.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3005	12.7	14.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3006	15.9	18.5	13.2	3.2 - 6.4	PA 66	UL94 V-2	black
H-3007	15.9	18.5	13.2	3.2 - 6.4	PA 66	UL94 V-2	white
H-3008	19.1	23.4	13.2	3.2 - 6.4	PA 66	UL94 V-2	black
H-3009	19.1	23.4	13.2	3.2 - 6.4	PA 66	UL94 V-2	white
H-2667	19.6	25.9	22.4	5.1 - 12.7	PA 66	UL94 V-2	black
H-2668	19.6	25.9	22.4	5.1 - 12.7	PA 66	UL94 V-2	white
H-3044	22.2	25.9	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3045	22.2	25.9	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3046	25.4	30.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3047	25.4	30.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3018	27.8 - 28.6	31	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3019	27.8 - 28.6	31	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3100	30.1	33.3	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3101	30.1	33.3	14.3	3.2 - 6.4	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-3102	31.8	35.1	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3103	31.8	35.1	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3106	34.9	38.1	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3107	34.9	38.1	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3048	38.1	42.4	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3049	38.1	42.4	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3027	44.5	48.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	black
H-3028	44.5	48.5	14.3	3.2 - 6.4	PA 66	UL94 V-2	white
H-3050	50.8	55.1	14.2	3.2 - 6.4	PA 66	UL94 V-2	black
H-3051	50.8	55.1	14.2	3.2 - 6.4	PA 66	UL94 V-2	white