
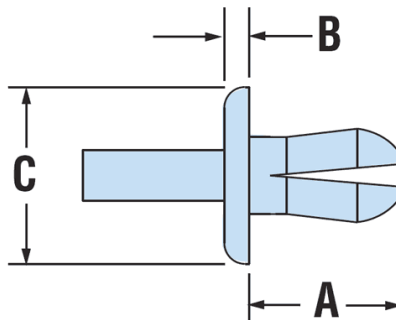


## H-DR - Drive rivets

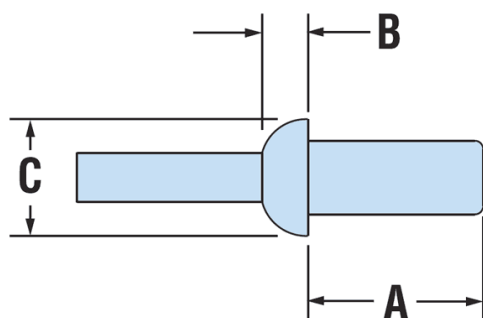

### Details:

- **Material:** Nylon 6
- **Colour:** black {BLK} or natural (NAT)
- Flammability Rating: UL 94 V-2
- Temperature Range: -40°C to 85°C
- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.

| Symbol | Mounting hole diameter | Panel thickness range | A    | Head height B | Head diameter C | Material | Flammability | Color   |
|--------|------------------------|-----------------------|------|---------------|-----------------|----------|--------------|---------|
|        | [mm]                   | [mm]                  | [mm] | [mm]          | [mm]            |          |              |         |
| H-9331 | 4.1                    | 4.0 - 6.5             | 8.1  | 1.5           | 7.5             | PA 6     | UL94 V-2     | black   |
| H-9332 | 4.1                    | 4.0 - 6.5             | 8.1  | 1.5           | 7.5             | PA 6     | UL94 V-2     | natural |
| H-9184 | 4.8                    | 1.0 - 9.5             | 10.7 | 1.5           | 7.1             | PA 6     | UL94 V-2     | black   |
| H-9185 | 4.8                    | 1.0 - 9.5             | 10.7 | 1.5           | 7.1             | PA 6     | UL94 V-2     | natural |
| H-9186 | 4.8                    | 4.0 - 7.1             | 9.7  | 1.5           | 10.9            | PA 6     | UL94 V-2     | black   |
| H-9187 | 4.8                    | 4.0 - 7.1             | 9.7  | 1.5           | 10.9            | PA 6     | UL94 V-2     | natural |
| H-9336 | 5.1                    | 1.5 - 7.0             | 9.1  | 1.8           | 8.5             | PA 6     | UL94 V-2     | black   |
| H-9188 | 5.5                    | 2.4 - 4.0             | 11.4 | 2             | 9.4             | PA 6     | UL94 V-2     | black   |
| H-9189 | 5.5                    | 2.4 - 4.0             | 11.4 | 2             | 9.4             | PA 6     | UL94 V-2     | natural |
| H-9337 | 6                      | 3.0 - 7.0             | 10   | 2             | 10.9            | PA 6     | UL94 V-2     | black   |
| H-9190 | 6.4                    | 1.5 - 6.4             | 9.3  | 4.7           | 11.1            | PA 6     | UL94 V-2     | black   |
| H-9191 | 6.4                    | 1.5 - 6.4             | 9.3  | 4.7           | 11.1            | PA 6     | UL94 V-2     | natural |
| H-9341 | 6.4                    | 3.0 - 7.0             | 12.5 | 2             | 11.9            | PA 6     | UL94 V-2     | black   |
| H-9192 | 6.4                    | 7.1 - 12.7            | 15.8 | 2             | 11.9            | PA 6     | UL94 V-2     | black   |
| H-9193 | 6.4                    | 7.1 - 12.7            | 15.8 | 2             | 11.9            | PA 6     | UL94 V-2     | natural |