

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-DS - Grommet Channels





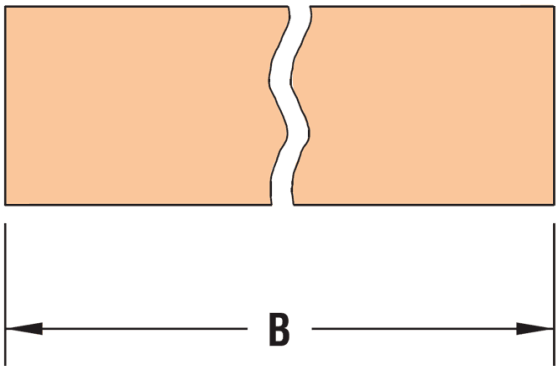

Details:

- **Material: PA66/6 MDS Filled Nylon**
- **Flammability Rating: UL94 HB**
- **Colour: grey**
- Temperature Range: -40°C to 65°C
- Good durability; MDS glue filling adheres to rubber, most plastics, wood and metal.
- Features built-in lubricant for reduced friction and longer part life.

Symbol	Panel thickness range	A	B	Material	Flammability	Color
	[mm]	[mm]	[m]			
H-12430	0.8 - 1.6	7.6	1.22	PA	UL94 HB	grey
H-12431	0.5 - 3.2	9.5	1.22	PA	UL94 HB	grey
H-12432	0.8 - 4.8	12.7	1.22	PA	UL94 HB	grey
H-12433	1.1 - 6.4	15.9	1.22	PA	UL94 HB	grey
H-12430R	0.8 - 1.6	7.6	30.5	PA	UL94 HB	grey
H-12431R	0.5 - 3.2	9.5	30.5	PA	UL94 HB	grey