


H-DSC - D-Subminiature Protection Caps

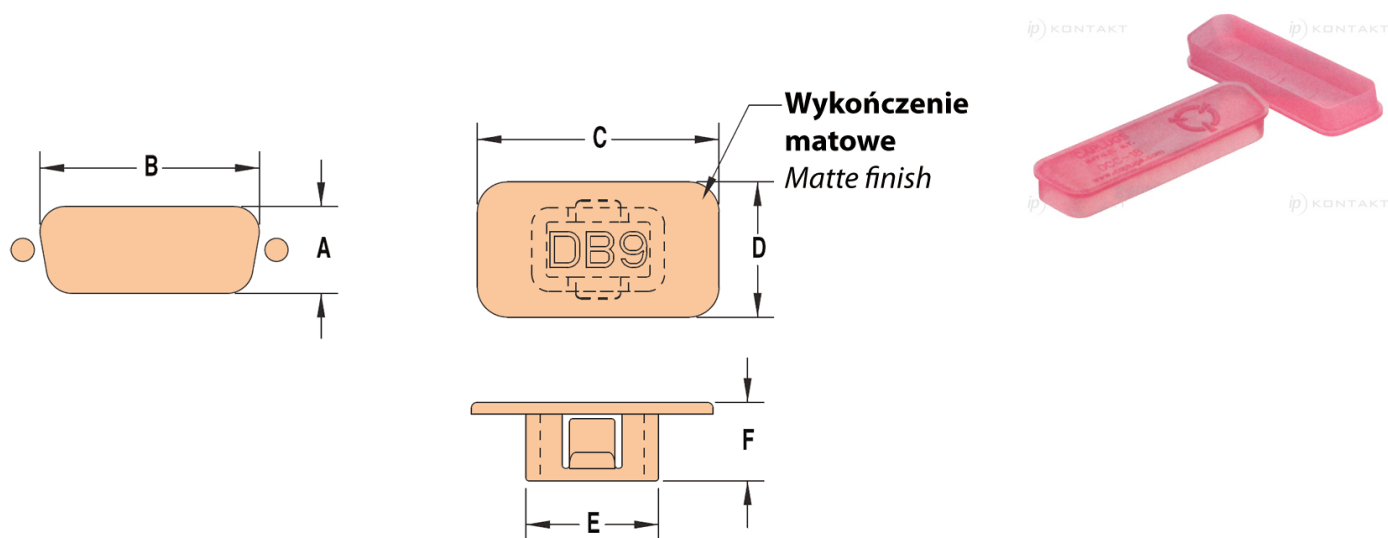

Details:

- **Material: Pink Static Dissipative Ethylene Vinyl Acetate (EVA).**
- **Colour: pink**
- Temperature Range: -68°C to 60°C
- Provides electrostatic discharge protection for rectangular D-subminiature input/output type connectors.
- integral flange for easy application and removal
- Fit over both Standard Density and High Density D-Sub Shells.
- Molded in pink dissipative ethylene vinyl acetate, which meets the static decay requirements of MIL-PRF-81705D: Surface resistivity less than $1 \times 10^{12} \Omega/\text{sq}$.

Symbol	Type	A	B	C	D	E	F
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
H-G5160	1 or E - 9 Socket	7.9	16.3	20.1	11.4	18.2	9.5
H-G5161	1 or E - 9 Pin	8.4	16.9	21.8	12.9	19.8	10.9
H-G5162	2 or A - 15 Socket	7.9	24.6	27.9	11.4	26.4	9.5
H-G5163	2 or A - 15 Pin	8.4	25.2	30.2	12.9	28.3	10.9
H-G5164	3 or B - 25 Socket	7.9	38.3	42.2	11.7	28.3	9.4
H-G5165	3 or B - 25 Pin	8.4	40	43.2	13.2	40.2	11
H-G5166	4 or C - 37 Socket	7.9	54.8	58.2	11.4	41	9.3
H-G5167	4 or C - 37 Pin	8.4	55.4	60.2	13.2	30.5	11.4
H-G5168	5 or D - 50 Socket	10.7	52.4	56.1	14.2	54.5	12.3
H-G5169	5 or D - 50 Pin	11.1	52.8	57.6	15.7	55.8	14
H-G5170	6 - 104 Socket	12.3	55.6	59.7	16.5	57.6	14.3
H-G5171	6 - 104 Pin	12.8	56.2	62	17.8	58.2	14.8