

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-FIVP - Filter Insert Vent Plugs



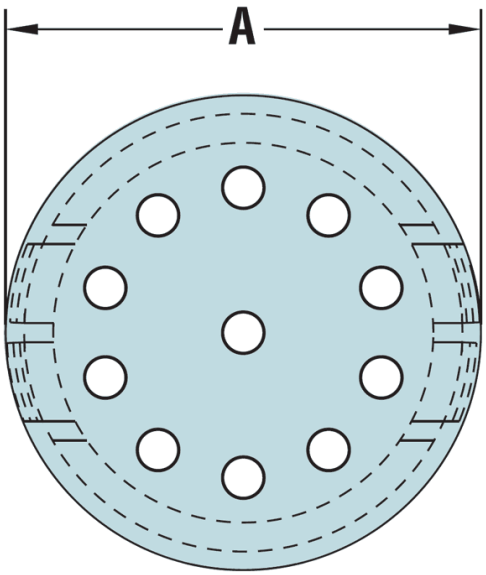

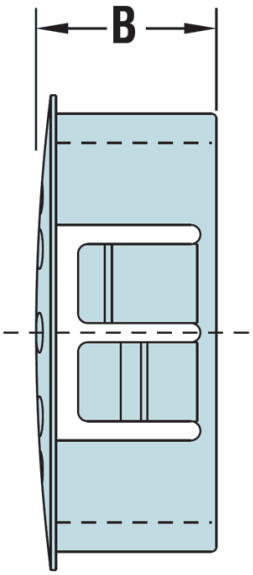

Details:

- **Material: Nylon 6/6**
- **Colour: black**
- **Temperature range: -40°C to 105°C**
- Filter inserts permit the passage of air for ventilation but limit liquid as well as dust and pest infiltration.
- Polyurethane foam filter will filter particle sizes 30 micron and larger.
- Filter is captive in body of vent plug and uses no additional real estate inside.

Symbol	Number of vent holes	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Color
		[mm]	[mm]	[mm]	[mm]		
H-4917	4	12.7	14.2	10.4	3.2 max.	PA 66	black
H-4919	9	22.2	25.8	11.5	3.2 max.	PA 66	black
H-4921	9	25.4	30.6	11.5	3.2 max.	PA 66	black
H-4923	9	27.8 - 28.6	30.9	11.5	3.2 max.	PA 66	black
H-4931	11	34.9	38.1	11.5	3.2 max.	PA 66	black
H-4933	13	38.1	42.4	11.5	3.2 max.	PA 66	black
H-4937	19	50.8	54.4	11.9	3.2 max.	PA 66	black
H-4973	9	22.2	25.8	14.3	6.4 max.	PA 66	black
H-4975	9	25.4	30.6	14.3	6.4 max.	PA 66	black
H-4977	9	27.8 - 28.6	30.9	14.3	6.4 max.	PA 66	black
H-4983	11	34.9	38.1	14.3	6.4 max.	PA 66	black
H-4985	13	38.1	42.4	14.3	6.4 max.	PA 66	black
H-4989	19	50.8	54.4	14.7	6.4 max.	PA 66	black
H-4939	19	63.5	69	19.1	6.4 max.	PA 66	black
H-4941	26	76.2	80	18.8	6.4 max.	PA 66	black