



## H-FSD - Feet of Strength

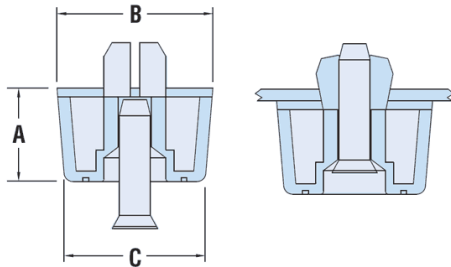

**Typ 1**  
**Type 1**

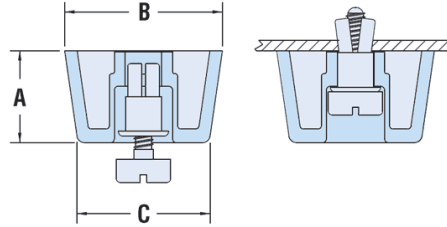

**Typ 2**  
**Type 2**



**Details:**

- **Material: Thermoplastic elastomer or Polypropylene & elastomer**
- **Colour: black**
- Molded of thermoplastic elastomer or polypropylene and elastomer blend for skid and vibration resistance.
- Two piece construction comes preassembled.

Symbol	Type	Height A	Ext. diameter B	C	Mounting hole diameter	Panel thickness range
		[mm]	[mm]		[mm]	[mm]
H-2543	1	5	25	23	7.6	0.8 - 1.5
H-2537	1	5	20	18	7.7	0.8 - 1.5
H-2544	1	6	21	20	7.7	5.0 - 8.0
H-2536	2	10	20	18	5	1.0 - 2.3
H-2545	1	10	20	18	7.8	0.8 - 1.5
H-2548	1	10	20	18	8.1	0.8 - 1.5
H-2547	1	12	20	18	8.1	0.5 - 1.2
H-2538	2	14	24	20	5	1.0 - 2.3
H-2549	1	15	20	18	8.1	0.8 - 1.8
H-2539	2	15	30	28	5	0.5 - 1.5
H-2551	1	18	20	18	8.1	0.5 - 1.2