


H-HDLSP4 - Nylon PCB Support

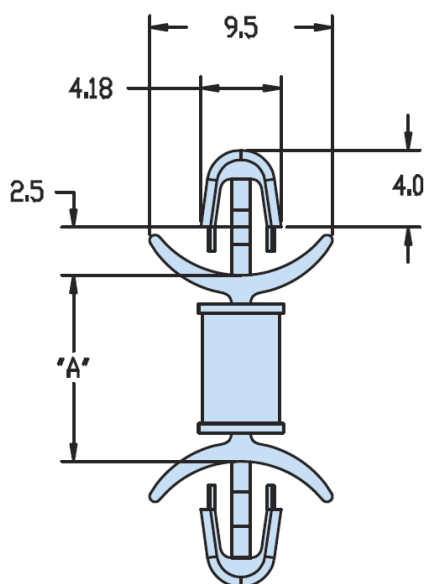

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10199	4.8	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10200	6.4	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10201	7.9	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10202	9.5	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10203	11.1	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10204	12.7	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10205	14.3	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10206	15.9	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural
H-10207	22.2	3.2	2.0 max.	3.2	2.0 max.	PA 66	UL94 V-2	natural