


H-HDLSP5 - Nylon PCB Support

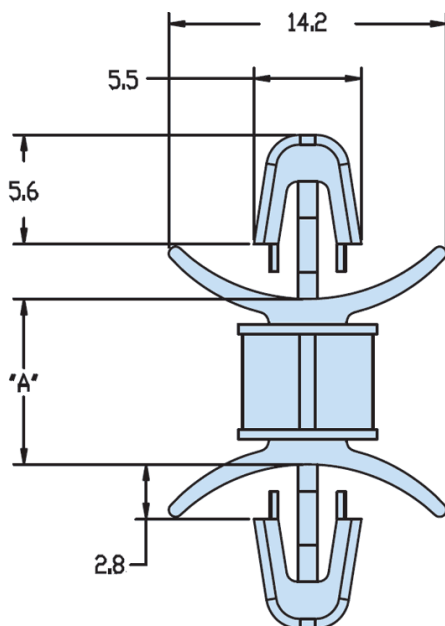

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10209	4.8	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10210	6.4	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10211	9.5	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10212	12.7	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10213	15.9	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10214	19.1	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10215	22.2	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural
H-10216	11.1	4	2.0 max.	4	2.0 max.	PA 66	UL94 V-2	natural