


H-HDLSP6 - Nylon PCB Support

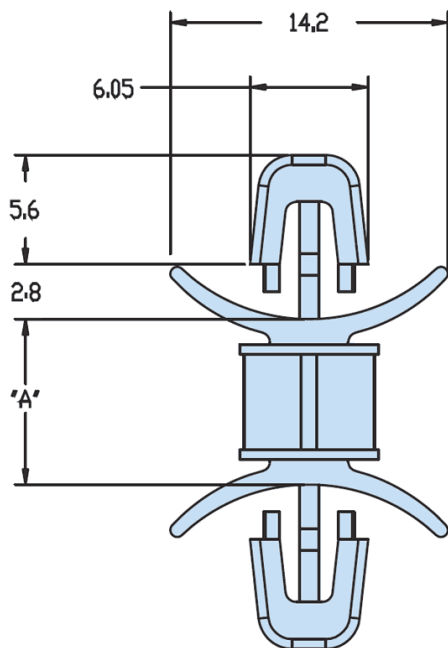

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10217	4.8	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10218	6.4	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10219	9.5	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10220	12.7	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10221	15.9	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10222	19.1	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10223	22.2	4.8	2.0 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural