


H-HDLSPTH - Nylon PCB Supports

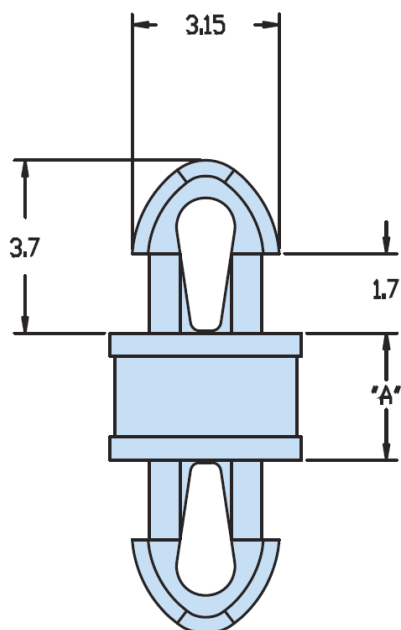

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10036	1.6	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10037	3.2	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10038	4.8	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10039	6.4	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10040	7.9	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10041	9.5	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10042	11.1	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10043	12.7	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10044	14.3	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10045	15.9	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural
H-10046	22.2	2.5	1.6 max.	2.5	1.6 max.	PA 66	UL94 V-2	natural