


## H-HFP - Self-extinguishing Dome Plugs

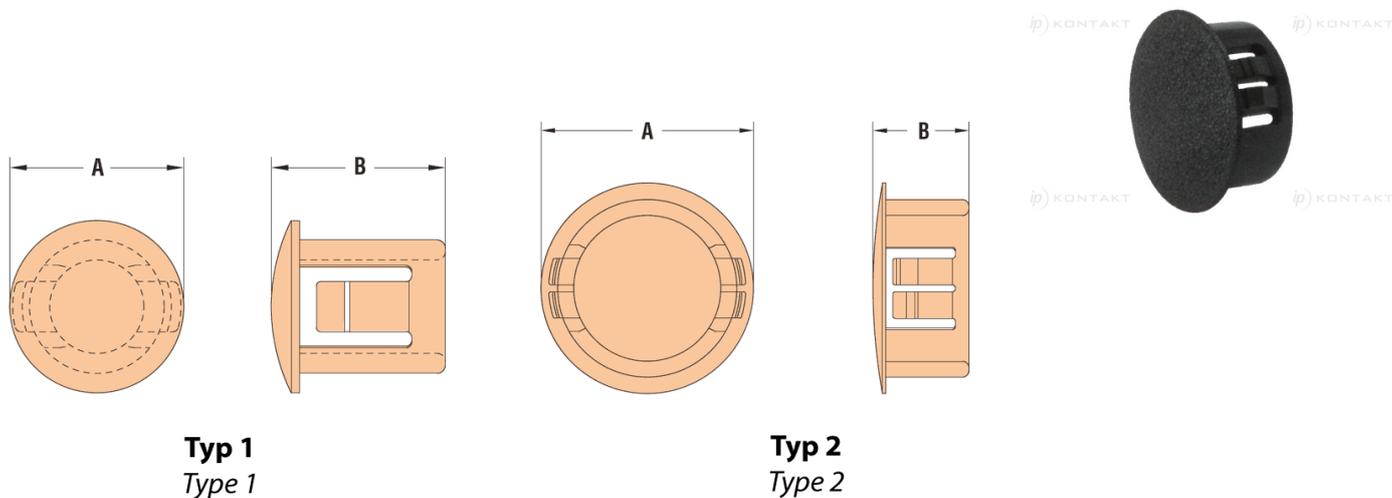

### Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-0**
- **Colour: black**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Halogen and Phosphorus-Free
- Type 1 - single panel thickness design
- Type 2 - multiple panel thickness design
- Convex, matte finish
- H-2593, H-3006F i H-3008F - gloss finish

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Type	Material	Flammability	Color
	[mm]			[mm]				
H-2593	4.7	6.4	6.1	1.6 max.	PA 66	UL94 V-0	black	1
H-2606	6.4	7.9	7.9	1.6 max.	PA 66	UL94 V-0	black	1
H-2616	7.9	9.5	7.9	1.6 max.	PA 66	UL94 V-0	black	1
H-2623	9.5	11.9	10.3	3.2 max.	PA 66	UL94 V-0	black	2
H-2636	11.1	13.5	10.3	3.2 max.	PA 66	UL94 V-0	black	2
H-2646	12.7	14.7	10.3	3.2 max.	PA 66	UL94 V-0	black	2
H-2666	15.9	18.2	10.3	3.2 max.	PA 66	UL94 V-0	black	2
H-2686	19.1	23.4	10.3	3.2 max.	PA 66	UL94 V-0	black	2
H-2706	22.2	25.8	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2716	25.4	30.6	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2729	27.8 - 28.6	30.9	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2749	31.7	34.9	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2759	34.9	38.1	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2769	38.1	42.8	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2779	44.5	48.7	11.5	3.2 max.	PA 66	UL94 V-0	black	2
H-2789	50.8	55.1	11.9	3.2 max.	PA 66	UL94 V-0	black	2
H-3004F	12.7	14.7	14.3	6.4 max.	PA 66	UL94 V-0	black	2

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-3006F	15.9	18.5	13.2	6.4 max.	PA 66	UL94 V-0	black	2
H-3008F	19.1	23.1	13.2	6.4 max.	PA 66	UL94 V-0	black	2
H-3044F	22.2	25.8	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3046F	25.4	30.6	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3018F	27.8 - 28.6	30.9	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3102F	31.7	34.9	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3106F	34.9	38.1	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3048F	38.1	42.4	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3027F	44.5	48.4	14.3	6.4 max.	PA 66	UL94 V-0	black	2
H-3050F	50.8	55.1	14.7	6.4 max.	PA 66	UL94 V-0	black	2