


H-HLSP1 - Nylon PCB Supports

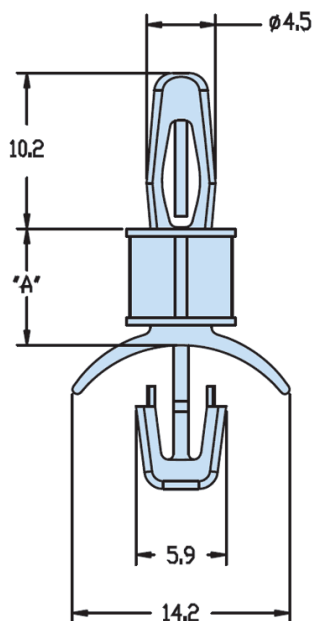

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- **Dimensions: ±0.1 mm**

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10048	4.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10049	6.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10050	7.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10051	9.5	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10052	11.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10053	12.7	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10054	15.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10055	19.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10056	22.2	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10057	25.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10058	28.6	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10059	31.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10060	34.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural