


H-HLSP11 - Tulejka plastikowa wciskana w otwór

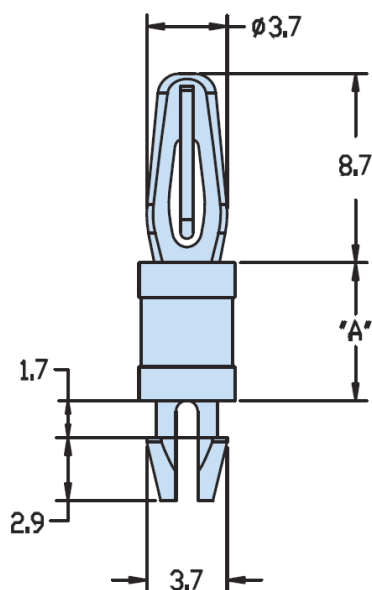

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10178	3.2	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10179	4.8	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10180	6.4	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10181	7.9	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10182	9.5	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10183	11.1	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10184	12.7	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10185	14.3	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10186	15.9	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10187	19.1	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10188	22.2	3.2	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural