


H-HLSP2 - Nylon PCB Supports

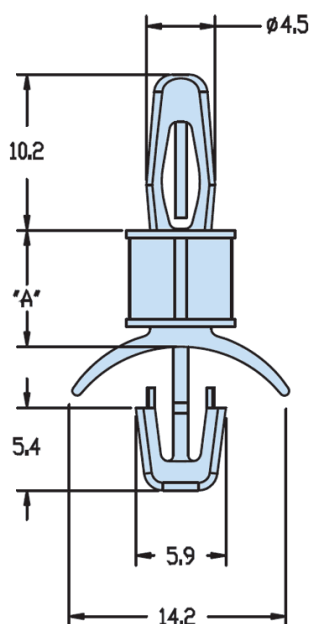

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10062	4.8	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10063	6.4	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10064	7.9	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10065	9.5	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10066	11.1	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10067	12.7	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10068	15.9	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10069	19.1	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10070	22.2	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10071	25.4	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10072	28.6	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10073	31.8	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10074	34.9	4	1.6 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural