


H-HLSP4 - Nylon PCB Support

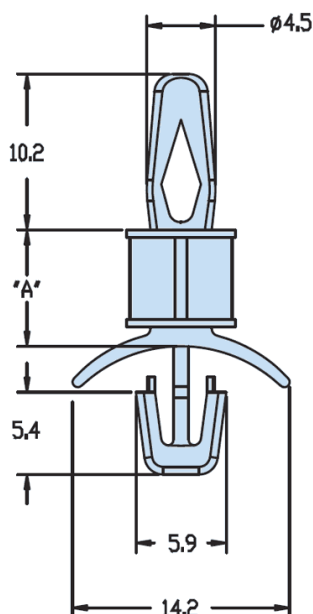

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10090	4.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10091	6.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10092	7.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10093	9.5	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10094	11.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10095	12.7	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10096	15.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10097	19.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10098	22.2	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10099	25.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10100	28.6	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10101	31.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10102	34.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural