


H-HLSP6 - Nylon PCB Support

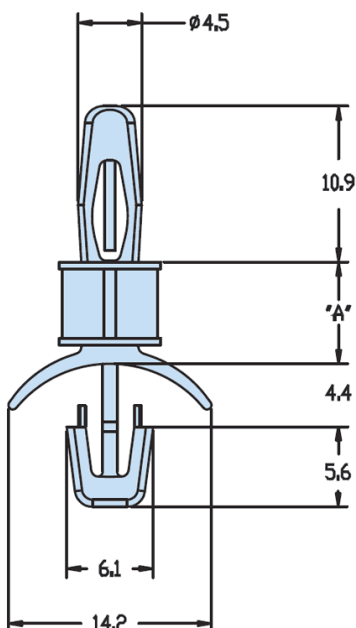

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10118	4.8	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10119	6.4	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10120	7.9	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10121	9.5	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10122	11.1	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10123	12.7	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10124	15.9	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10125	19.1	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10126	22.2	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10127	25.4	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10128	28.6	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10129	31.8	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural
H-10130	34.9	4	2.3 max.	4.8	3.6 max.	PA 66	UL94 V-2	natural