


H-HLSP7 - Nylon PCB Support

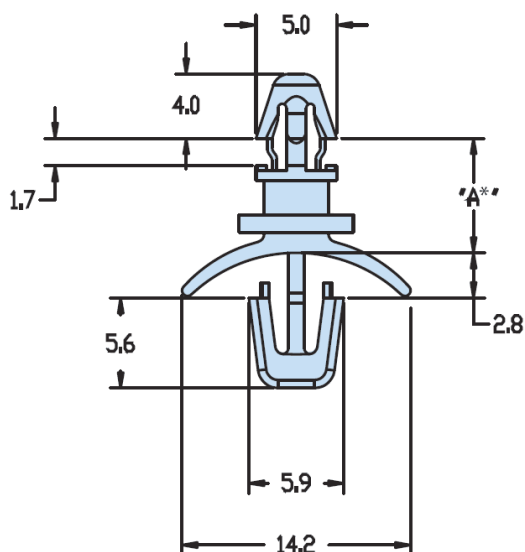

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- Dimension A = height to top of PCB
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10132	4.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10133	6.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10134	7.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10135	9.5	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10136	11.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10137	12.7	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10138	15.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10139	19.1	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10140	22.2	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10141	25.4	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10142	28.6	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10143	31.8	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural
H-10144	34.9	4	1.6 max.	4.8	2.0 max.	PA 66	UL94 V-2	natural