


H-HMB - Shorty Mounting buttons

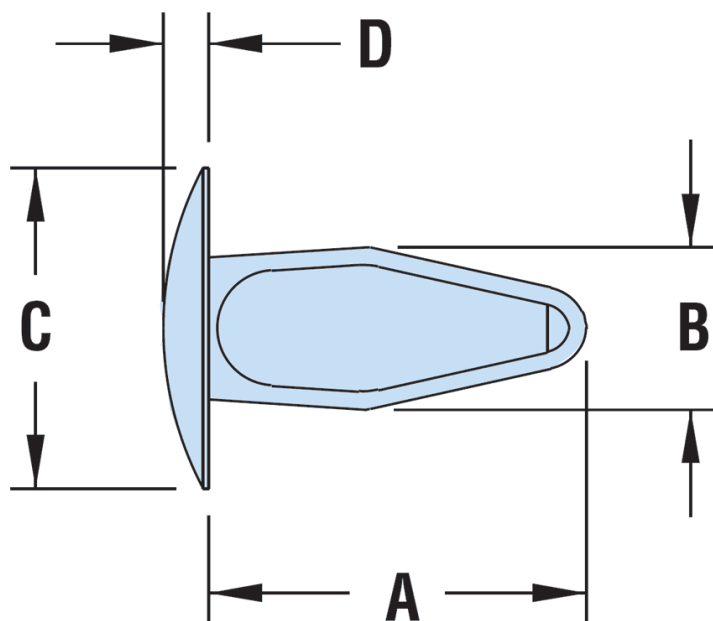

Details:

- **Material:** Nylon 6/6
- **Colour:** natural or black
- Flammability Rating: UL94 V-2
- Temperature Range: 0°C to 85°C

Symbol	Panel thickness range	Mounting hole diameter range	A	B	Head diameter ØC	Head height D	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
H-4138	1.5 - 2.1	3.1 - 3.2	6	3.4	7	1.2	PA 66	UL94 V-2	natural
H-4139	2.0 - 3.5	3.0 - 3.2	8.3	3.5	7.4	1.4	PA 66	UL94 V-2	natural
H-4199	2.0 - 2.5	3.1 - 3.2	8.4	2.2	7.1	1.2	PA 66	UL94 V-2	natural
H-4199B	2.0 - 2.5	3.1 - 3.2	8.4	2.2	7.1	1.2	PA 66	UL94 V-2	black
H-4200	2.9 - 4.0	3.3 - 3.6	11.1	3.2	10.3	1.7	PA 66	UL94 V-2	natural
H-4200B	2.9 - 4.0	3.3 - 3.6	11.1	3.2	10.3	1.7	PA 66	UL94 V-2	black
H-4201	2.5 - 4.0	4.6 - 4.9	10.9	4	12.7	2.2	PA 66	UL94 V-2	natural
H-4201B	2.5 - 4.0	4.6 - 4.9	10.9	4	12.7	2.2	PA 66	UL94 V-2	black
H-0321	3.2 - 6.4	6.4 - 6.6	16	7.1	12.7	1.3	PA 66	UL94 V-2	natural
H-0321B	3.2 - 6.4	6.4 - 6.6	16	7.1	12.7	1.3	PA 66	UL94 V-2	black
H-0306	7.9 - 8.4	4.6 - 4.9	14	5.7	9.7	1.5	PA 66	UL94 V-2	natural
H-0306B	7.9 - 8.4	4.6 - 4.9	14	5.7	9.7	1.5	PA 66	UL94 V-2	black
H-0324	12.7 - 19.1	6.4 - 6.6	28.8	7.3	15.5	1.7	PA 66	UL94 V-2	natural
H-0324B	12.7 - 19.1	6.4 - 6.6	28.8	7.3	15.5	1.7	PA 66	UL94 V-2	black