
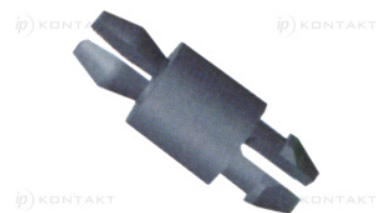


H-HMCCBP - Nylon PCB Support

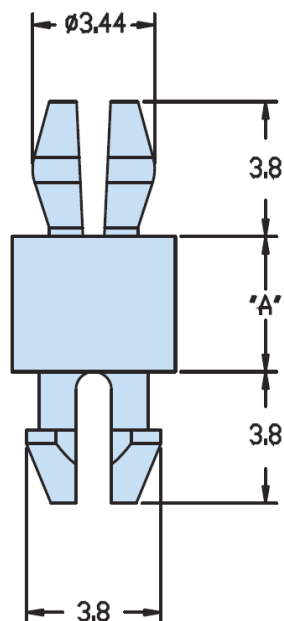

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- Dimension A = height
- Dimensions: ±0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10243	1.6	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10244	3.2	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10245	4.8	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10246	6.4	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10247	7.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10248	9.5	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10249	11.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10250	12.7	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10251	14.3	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10252	15.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10253	17.5	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10254	19.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10255	20.6	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10256	22.2	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10257	25.4	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10258	28.6	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10259	31.8	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10260	34.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10261	38.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural