


H-HMP - Mounting buttons

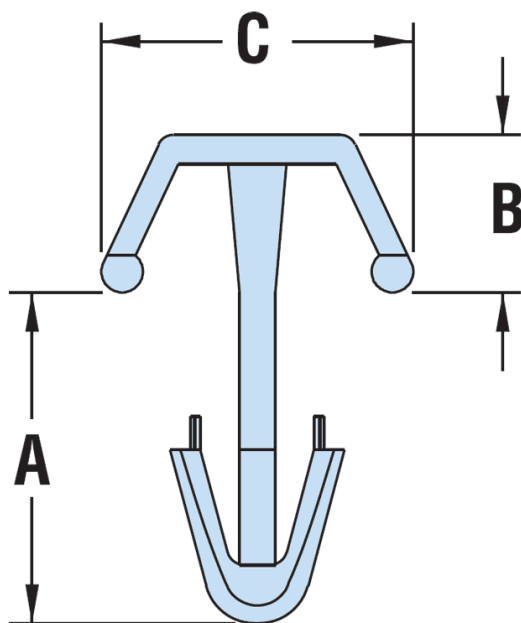

Details:

- **Material:** Nylon 6/6
- **Colour:** natural
- Flammability Rating: UL94 V-2
- Temperature Range: 0°C to 85°C
- An easy and economical solution to mating objects together.
- The mounting arrowhead locks securely in place yet allows for removal from underside of board.

Symbol	Mounting hole diameter	Panel thickness range	A	B	C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-4251	4	0.8 - 2.4	6.1	4.8	9.5	PA 66	UL94 V-2	natural
H-4252	4	2.4 - 4.0	7.7	4.8	9.5	PA 66	UL94 V-2	natural
H-4253	4	4.8 - 5.6	10.1	4.8	9.5	PA 66	UL94 V-2	natural
H-4254	4	5.6 - 7.1	10.9	4.8	9.5	PA 66	UL94 V-2	natural
H-4255	4	7.9 - 9.5	13.2	4.8	9.5	PA 66	UL94 V-2	natural
H-4256	4	9.5 - 11.1	14.8	4.8	9.5	PA 66	UL94 V-2	natural
H-4257	4	11.1 - 12.7	16.4	4.8	9.5	PA 66	UL94 V-2	natural
H-4258	4	12.7 - 14.3	18	4.8	9.5	PA 66	UL94 V-2	natural
H-4259	4	14.3 - 15.9	19.6	4.8	9.5	PA 66	UL94 V-2	natural
H-14251	4.7	0.8 - 2.4	6.1	4.8	12.3	PA 66	UL94 V-2	natural
H-14252	4.7	2.4 - 4.0	7.7	4.8	12.3	PA 66	UL94 V-2	natural
H-14253	4.7	4.8 - 5.6	10.1	4.8	12.3	PA 66	UL94 V-2	natural
H-14254	4.7	5.6 - 7.1	10.9	4.8	12.3	PA 66	UL94 V-2	natural
H-14255	4.7	7.9 - 9.5	13.2	4.8	12.3	PA 66	UL94 V-2	natural
H-14256	4.7	9.5 - 11.1	14.8	4.8	12.3	PA 66	UL94 V-2	natural
H-14257	4.7	11.1 - 12.7	16.4	4.8	12.3	PA 66	UL94 V-2	natural
H-14258	4.7	12.7 - 14.3	18	4.8	12.3	PA 66	UL94 V-2	natural
H-14259	4.7	14.3 - 15.9	19.6	4.8	12.3	PA 66	UL94 V-2	natural