


H-HMSPDL - Nylon PCB Supports

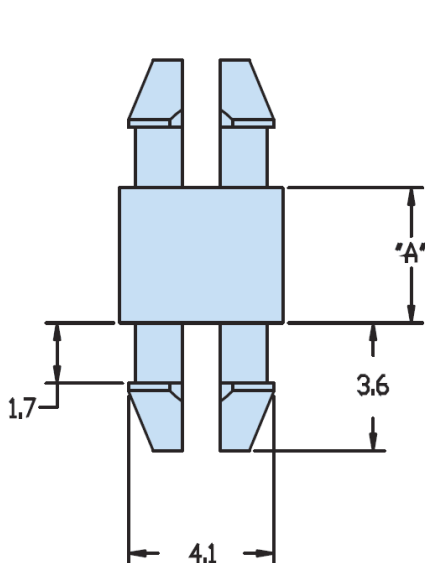

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10301	3.2	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10302	4.8	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10303	6.4	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10304	7.9	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10305	9.5	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10306	11.1	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10307	12.7	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10308	14.3	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10309	15.9	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10310	17.5	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10311	19.1	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10312	20.6	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10313	22.2	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10314	25.4	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10315	28.6	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10316	31.8	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10317	34.9	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural
H-10318	38.1	3.9	1.6	3.9	1.6	PA 66	UL94 V-2	natural