
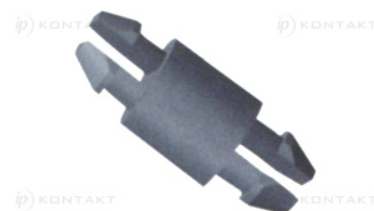


H-HMSPDLN - Nylon PCB Supports

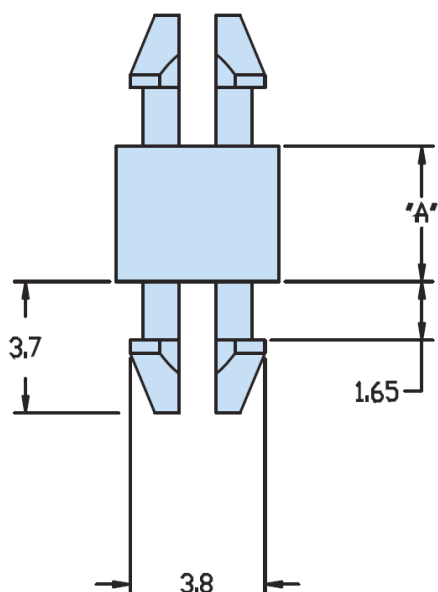

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- **Dimensions:** ±0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10282	3.2	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10283	4.8	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10284	6.4	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10285	7.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10286	9.5	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10287	11.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10288	12.7	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10289	14.3	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10290	15.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10291	17.5	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10292	19.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10293	20.6	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10294	22.2	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10295	25.4	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10296	28.6	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10297	31.8	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10298	34.9	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural
H-10299	38.1	3.2	1.6	3.2	1.6	PA 66	UL94 V-2	natural