


H-HRR - Removable rivets

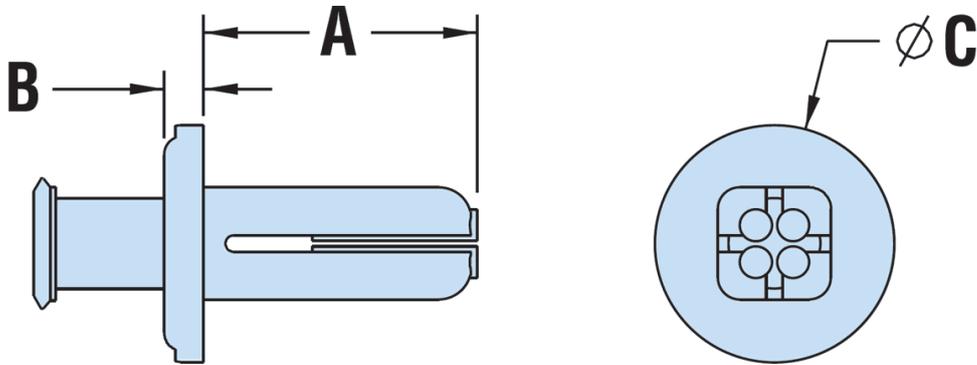

Details:

- **Material:** Nylon 6/6
- **Colour:** natural
- Flammability Rating: UL94 V-2
- Temperature Range: 0°C to 85°C
- Two-piece rivet can be removed by retracting the pin then the body.
- Slot in line with pin for pin removal with small screw driver, fingernail or other sharp edge underneath the head of the pin.

Symbol	Mounting hole diameter	Panel thickness	A	Head height B	Head diameter C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-12220	4.8	1.6	12.7	1.8	9.5	PA 66	UL94 V-2	natural
H-12221	4.8	3.2	12.7	1.8	9.5	PA 66	UL94 V-2	natural
H-12222	6.4	1.6	12.7	1.8	11.1	PA 66	UL94 V-2	natural
H-12223	6.4	3.2	12.7	1.8	11.1	PA 66	UL94 V-2	natural
H-12224	6.4	4.7	12.7	1.8	11.1	PA 66	UL94 V-2	natural