


H-HSP-MDLS-2 - Nylon PCB Supports

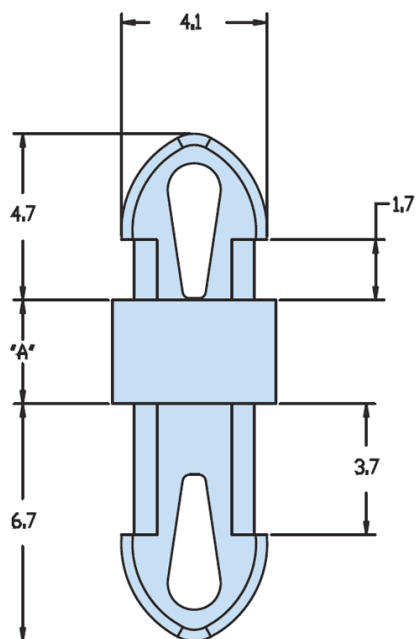

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10493	2	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10494	3	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10495	4	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10496	5	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10497	6	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10498	7	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10499	8	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10500	10	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10501	12	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10502	14	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10503	16	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10504	18	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10505	20	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural
H-10506	22	3.5	1.6	3.5	3.6	PA 66	UL94 V-2	natural