


H-HSP1 - Nylon PCB Supports

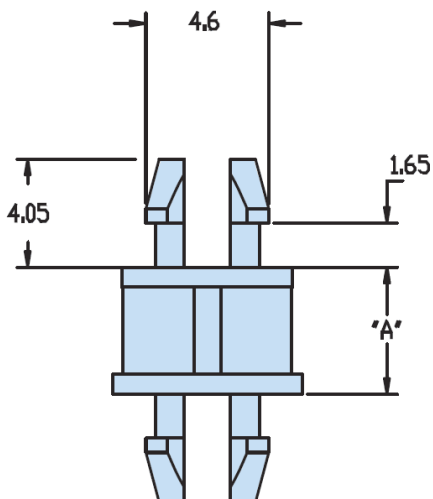

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- **Dimensions: ± 0.1 mm**

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10000	4.8	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10001	6.4	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10002	7.9	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10003	9.5	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10004	11.1	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10005	12.7	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10006	14.3	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10007	15.9	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10008	19.1	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10009	22.2	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural
H-10010	25.4	4	1.6 max.	4	1.6 max.	PA 66	UL94 V-2	natural