


H-HSP2 - Nylon PCB Supports

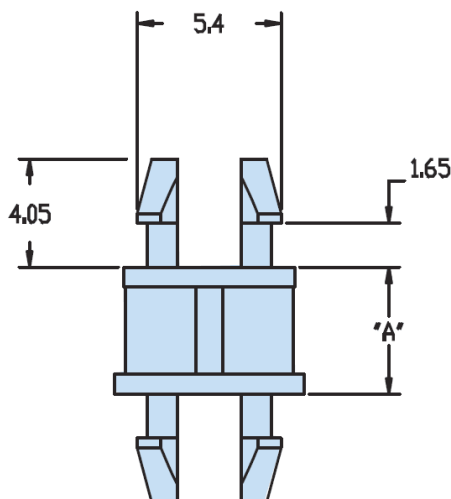

Details:

- **Material Nylon 6/6 UL94 V-2**
- **UL94 V-0 available on special order**
- **Temperature Range: -40°C to 85°C**
- **Dimension A = height**
- **Dimensions: ±0.1 mm**

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10012	4.8	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10013	6.4	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10014	7.9	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10015	9.5	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10016	11.1	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10017	12.7	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10018	14.3	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10019	15.9	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10020	19.1	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10021	22.2	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural
H-10022	25.4	4.8	1.6 max.	4.8	1.6 max.	PA 66	UL94 V-2	natural