


H-HSRS4 - Nylon PCB self-retaining spacers

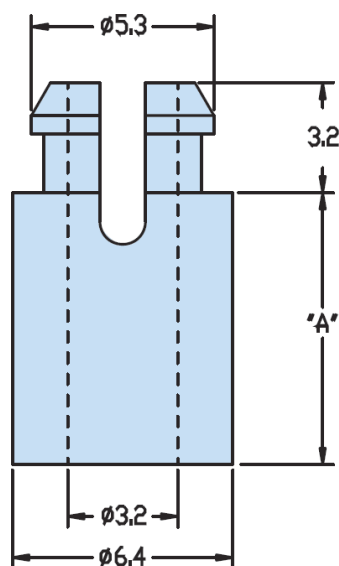

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Material** Nylon 6/6 UL94 V-0 available on special order
- **Colour:** natural
- **Temperature Range:** -40°C to 85°C
- #4 or M3 self-tapping screw
- Dimension A = thread depth
- Dimensions: ±0.1 mm

Symbol	Height A	Panel thickness	Mounting hole diameter	Thread	Material	Flammability	Color
	[mm]						
H-10627	3.2	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10628	4.8	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10629	6.4	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10630	7.9	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10631	9.5	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10632	11.1	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10633	12.7	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10634	15.9	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10635	19.1	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10636	22.2	1.6	4.7	M3	PA 66	UL94 V-2	natural
H-10637	25.4	1.6	4.7	M3	PA 66	UL94 V-2	natural